

# SUN2000-12-25KTL-M5



- Security Level:



1

SUN2000-12-25KTL-M5

# Smart Energy Controller Your Magic PV Box

SUN2000-12-25KTL-M5

Available: Nov 2022



## More Options

Full range optimizer supported

**450W-1300W** optimizer supported

## Higher Compatibility

Support module power upgrade

MPPT Current **30A**

Support Module  $I_{mpp}$  **20A**



## Higher Reliability

10-year warranty, 25-year design lifetime

IP65 ↗ **IP66**

## Easier Installation

1 person required

25KG ↘ **21KG**

# Specifications of SUN2000-12-25KTL-M5

SUN2000-12/15/17/20/25KTL-M5

## Technical Specification

Technical Specification	SUN2000 -12KTL-M5	SUN2000 -15KTL-M5	SUN2000 -17KTL-M5	SUN2000 -20KTL-M5	SUN2000 -25KTL-M5
<b>Efficiency</b>					
Max. efficiency	98.4%	98.4%	98.4%	98.4%	98.4%
European weighted efficiency	97.9%	98.0%	98.1%	98.1%	98.2%
<b>Input</b>					
Recommended max. PV power <sup>1</sup>	18,000 Wp	22,500 Wp	25,500 Wp	30,000 Wp	37,500 Wp
Max. input voltage <sup>2</sup>	1100 V				
Full-load MPPT voltage range	370V~800V	410V~800V	440V~800V	480V~800V	530~800V
MPPT Operating voltage range <sup>3</sup>	200 V ~ 1000 V				
Start-up voltage	200 V				
Rated input voltage	600 V				
Max. input current per MPPT	30 A (two string) / 20 A (single string)				
Max. short-circuit current	40 A				
Number of MPP trackers	2				
Max. number of inputs	4				
<b>Output</b>					
Grid connection	Three phase				
Rated output power	12,000 W	15,000 W	17,000 W	20,000 W	25,000 W
Max. apparent power	13,200 W	16,500 VA	18,700 VA	22,000 VA	27,500 VA
Rated output voltage	220 Vac / 380 Vac, 230 Vac / 400 Vac, 239.6 Vac / 415Vac, 3W + N + PE				
Rated AC grid frequency	50 Hz / 60 Hz				
Max. output current	18.2A/380Vac	25.2A/380Vac	28.6A/380Vac	33.6A/380Vac	42.0A/380Vac
	17.3A/400Vac	23.9A/400Vac	27.1A/400Vac	31.9A/400Vac	39.9A/400Vac
	16.7A/415Vac	23.1A/415Vac	26.1A/415Vac	30.8A/415Vac	38.5A/415Vac
Adjustable power factor	0.8 leading ... 0.8 lagging				
Max. total harmonic distortion	≤ 3 %				

# MPPT current upgradation

Support high power module better

## SUN2000-12~25KTL-M5 MPPT Current **30A**

	210 Half-cut	210 Three cut	182	182 Double glass
Imp	17.6A	11.9A	13.3A	15A
String number	2	4	4	4
Module number	23	23	19	19
String power	13.8kW	9.2kW	10.5kW	11.8kW
DC Power	27.6kW	36.8kW	42kW	47.2kW
DC/AC	≥1.1	≥1.4	≥1.6	≥1.8



- The current of PV module keep increase in those days as the silicon size keep increase
- G12(210) Half cut module Imp achieve **17.6A**



### For new SUN2000-12-25KTL-M5

- Each MPPT support:
- Two string connection :30A  
(Connect two Imp 15A module strings)
  - One string connection:20A  
(Connect one Imp 20A module string)

The DC/AC ratio for 210 half-cut module could reach 1.1



Support high power module better

# Less weight, Easer for Installation

Easer for one person to do installation



SUN2000-12-20KTL-M2

25 kg



SUN2000-12-25KTL-M5

21 kg



25 kg to 21 kg, Easer for Installation





# Higher Protection Level

Higher IP protection level for higher reliability



SUN2000-12-20KTL-M2

IP65



SUN2000-12-25KTL-M5

IP66



Upgrade IP65 to IP66, More Reliable



# Embrace Optimizer Freedom

Compatible with optimizer from 450W-1300W



SUN2000-450/600W-P



MERC-1100/1300W-P

SUN2000-12-25KTL-M5 Optimizer Compatibility	
SUN2000-450W-P/P2	√
SUN2000-600W-P	√
MERC-1100W-P	√
MERC-1300W-P	√



More Flexible with Optimizer



# Electro Magnetic Compatibility (EMC)


## Providing Qualified Inverter

### What is it?



- The ability of electrical equipment is limiting the unintentional generation of electromagnetic energy.
- The phenomenon of switching off the phone in airplane or hearing noise from Radio are EMC fact.

### Industry Research

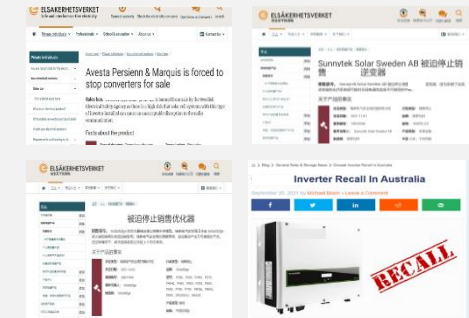

- One European Survey shows that only 25% of PV system passed the EMC test.
- The federal government has published some inverter companies and ask them to recall their inverters which didnt pass EMC standard.



Recall or Upgrade in future for EMC

# Electro Magnetic Compatibility

Providing Qualified Inverter

## Unique 3-Layer EMC Protection Design



## EMC Test Center



10m Radiated Emissions Test Center

Ease from Mind of EMC

From DC Input to AC output, EMC protection covers all the sides.

# Best-in-class Reliability

Built to last for Decades



XX Brand



No protect shield on the top, object easy to fall in to the fan

- Use ordinary fan with poor strength blade
- No protection on the fan top. Leaves and rain fall cause high failure rate

VS



Outer Protection Shield

HW

- External fan blade, bearings, and lubricants are reinforced to provide longer lifetime and lower failure rate.

Fan Design Lifetime  
**90,000h @ 40°C**

40°C Operating Period  
**>31Year**


\*Assume inverter daily operate 8 hours

Fan Annual Failure Rate(for outer fan)  
**<0.5%**




# Smart MPP Tracking Algorithm

## Smarter & Faster Multi-peak Tracking for Higher Yields

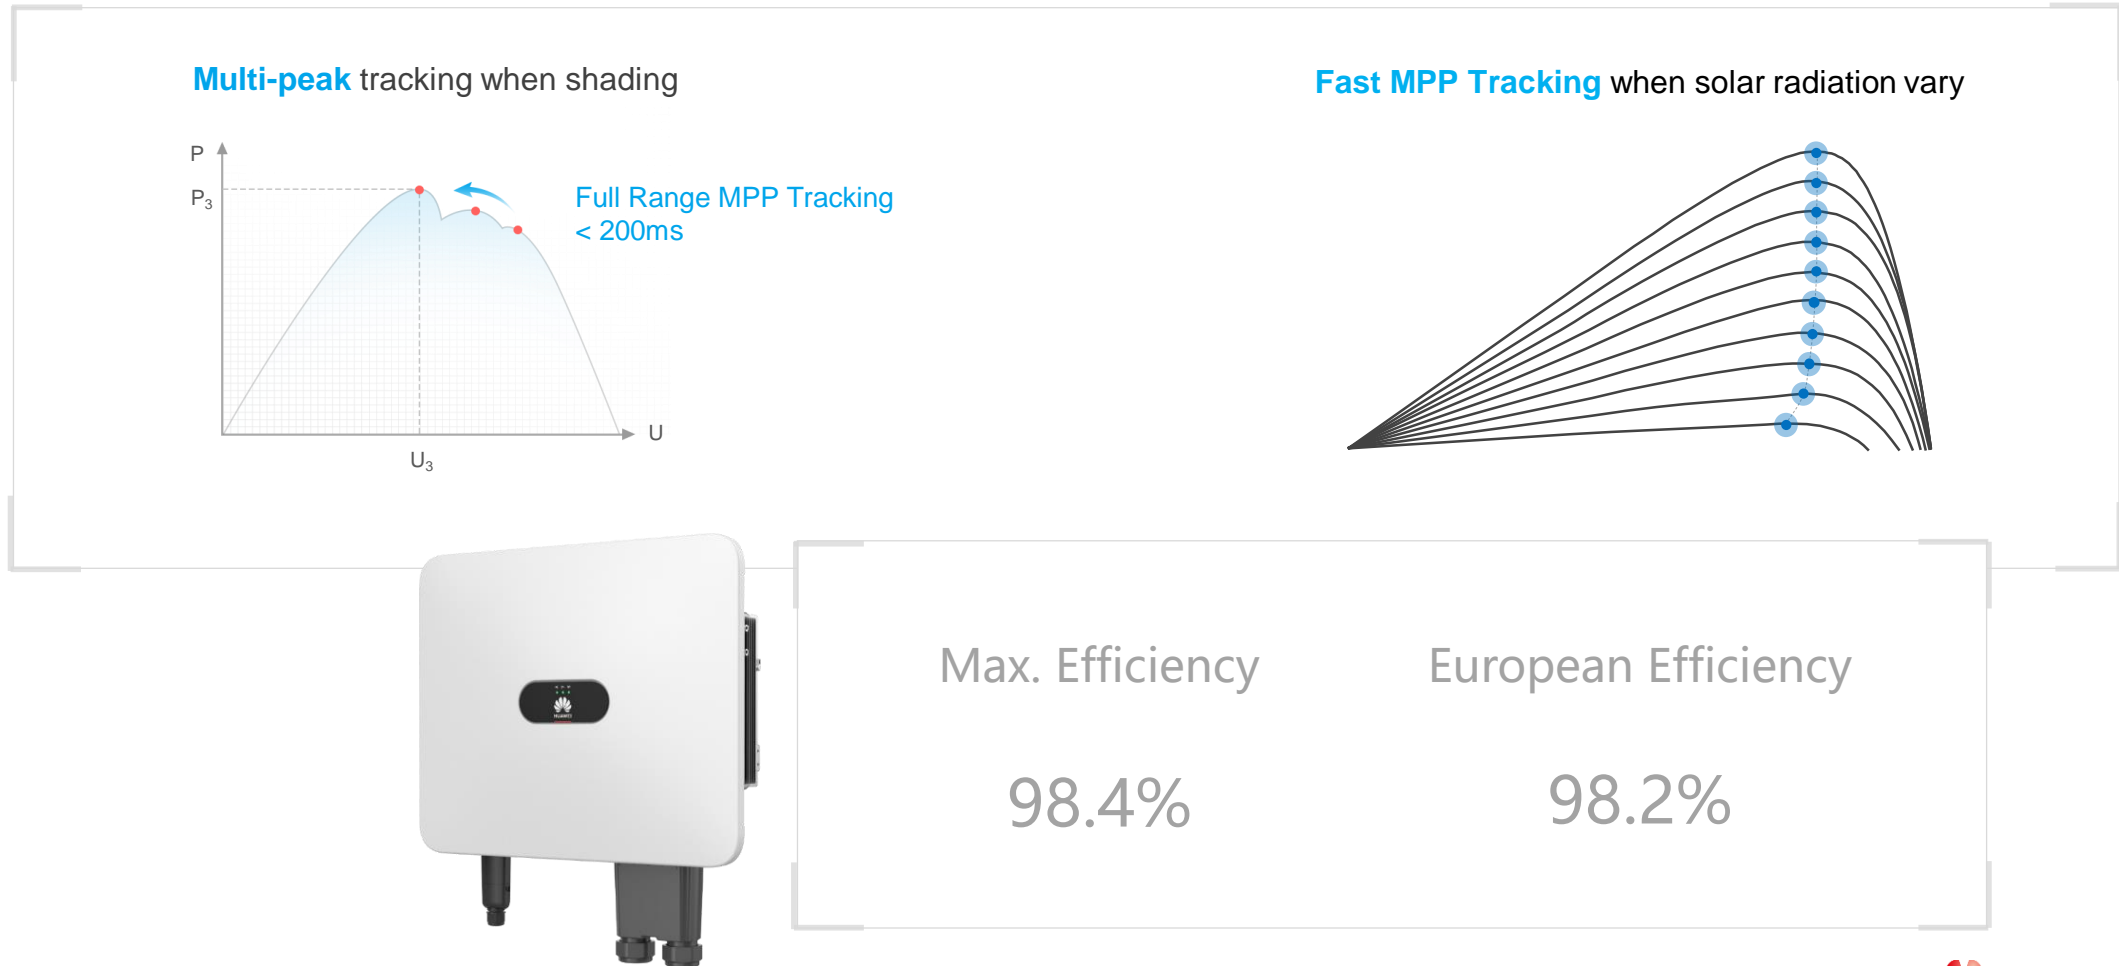

# 10 Devices

One Smart Dongle Supports Up to 10 Devices

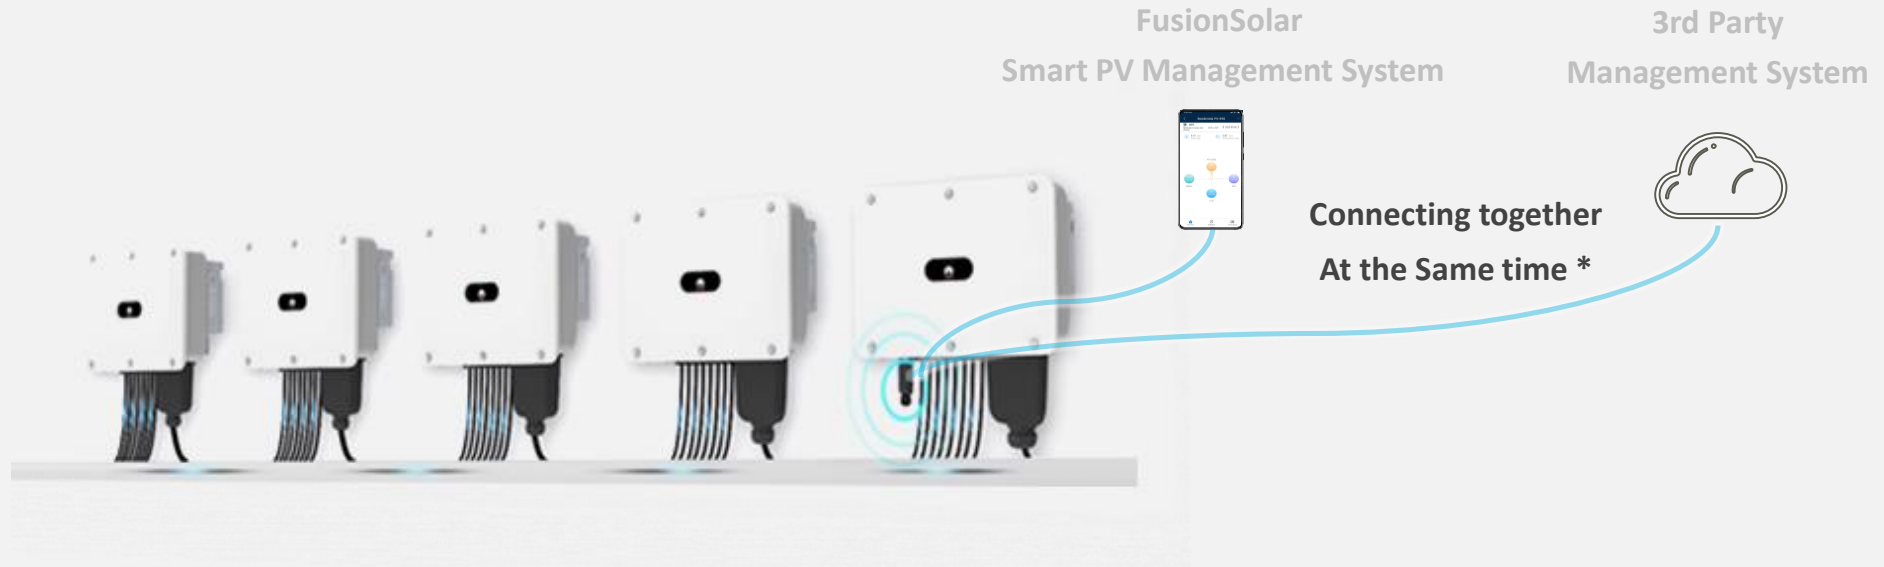

Inverters commissioning can be synchronized via a single dongle



Grid-connected Power Control can be achieved through the WLAN-FE/4G dongles



Wireless AP is built-in for local commissioning \*

One Dongle For One PV Plant

# Smart Design Tool

More Easier but Professional



## EASY MODELING

with Satellite View

## PROFESSIONAL LAYOUT

make the most of roof

## VIVID REPORT

everything at a glance



Fit with SmartDesign 2.0 for Better Experience




# Smart PV Controller and Smart Module Controller



SUN2000 - 12 / 15 / 17 / 20 / 25KTL - M5  
Three-phase inverter

- 2× 30 A MPPT, 4× PV strings
- Equipped with intelligent air cooling system
- RS485 communication
- Support 450W/600W/1100W/1300W Optimizer
- Supports AFCI, PID repair, and IV diagnosis.



SUN2000-450W-P2/P2  
SUN2000-600W-P

- Communicate through the DC MBUS.
- Short circuit current is 13 / 14.5 A
- Each PV module works at the maximum power point
- Module-level monitoring
- 1 k $\Omega$  open circuit resistance, used for wiring detection during installation
- When the inverter is not working, reduce the system voltage to 0 V.



MERC-1100W/1300W-P

- Communicates through the DC MBUS.
- Short circuit current is 20 A
- Each PV module works at the maximum power point.
- Module-level monitoring
- Test voltage: 1V, used for wiring test during installation
- When the inverter is not working, reduce the system voltage to safe level.

# Smart Dongle



NEW

Smart Dongle-WLAN-FE  
SDongleA-05(AP+STA)

- A maximum of 10 devices are supported.
- Plug-and-play, connected to the inverter through a USB port
- Communicate through FE or Wi-Fi
- Communicate to 3<sup>rd</sup> party Management System and FusionSolar System at the same time
- Local deployment is supported (when the inverter does not have WLAN hotspots)




NEW

Smart Dongle-4G  
SDongleB-06

- Supports 10 devices.
- Plug-and-play, connected to the inverter through a USB port
- Communicate through 4G.
- Communicate to 3<sup>rd</sup> party Management System and FusionSolar System at the same time
- Local deployment is supported (when the inverter does not have WLAN hotspots)

# Dongle Upgrading

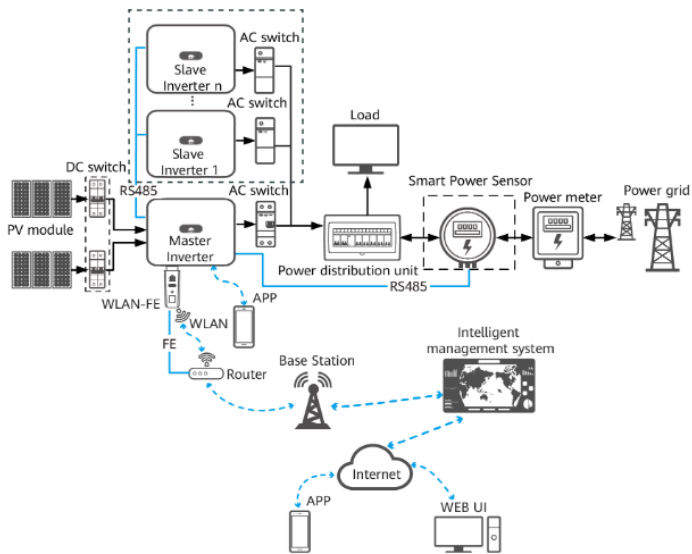

## Dongle 2.0

### Management System:

Communicate with one of FusionSolar or 3<sup>rd</sup> party Management System

\*3<sup>rd</sup> party management system should be compatible with Huawei SDongle MODBUS Interface Definitions. Currently only for M5 inverters.

### Deployment:

Deployment can be performed only through the inverter hotspot.



Smart Dongle-WLAN-FE  
SDongleA-05



Smart Dongle-4G  
SDongleA-06-EU/KR/AU/JP  
4G/3G/2G

## Dongle 2.0+

### Double throw:

Communicate with FusionSolar and 3<sup>rd</sup> party Management System at the same time.

### Deployment:

Deployment can be implemented through the Dongle hotspot.

When all inverters support WLAN hotspot, hotspot of Dongle will be disabled by default. When at least 1 inverter doesn't support WLAN hotspot, hotspot of Dongle will be enabled by default for local deploying.



Smart Dongle-WLAN-FE  
SDongleA-05(AP+STA)



Smart Dongle-4G  
SDongleB-06-EU  
4G  
SDongleB-06-AU  
4G/3G/2G  
SDongleB-06-NH  
4G


# Dongle connect to 2 management Systems

This is used when the inverter need to be connected to a 3<sup>rd</sup>-party Mmanagement System. To ensure O&M, the inverter want also to be connected to FusionSolar Management system:

Classification	Management System Port- 0	Management System Port- 1
Protocol	Standard Modbus protocol	Standard Modbus protocol
Management System	1. FusionSolar Management System 2. 3 <sup>rd</sup> -party Management System	1. 3 <sup>rd</sup> -party Management System
Inverters	All SUN2000 Inverters	Only for M5 Inverters by local commissioning now

3<sup>RD</sup> Party Management System

FusionSolar Management System

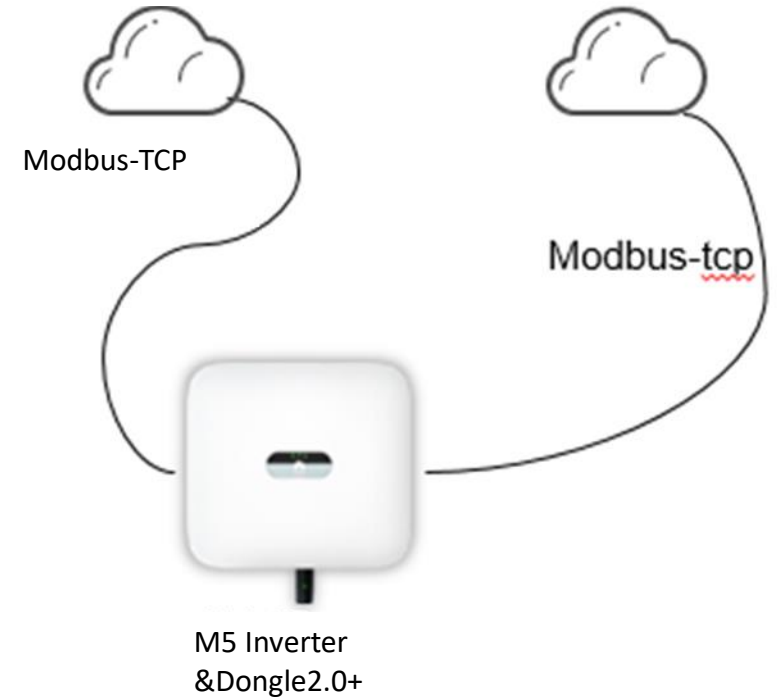

# Smart Power Sensor




DTSU666-H 100A  
(three phase)

- Connects to the inverter through RS485.
- Class 1 precision for power and energy
- Power control at the grid-connected point
- External CT attached with the box, 100A range
- 485 cable with 10m length is attached with the box



DTSU666-H 250A  
(three phase)

- Connects to the inverter through RS485.
- Class 1 precision for power and energy
- Power control at the grid-connected point
- The external CT is attached with the box, and the current range is 250A.
- 485 cable with 10m length is attached with the box

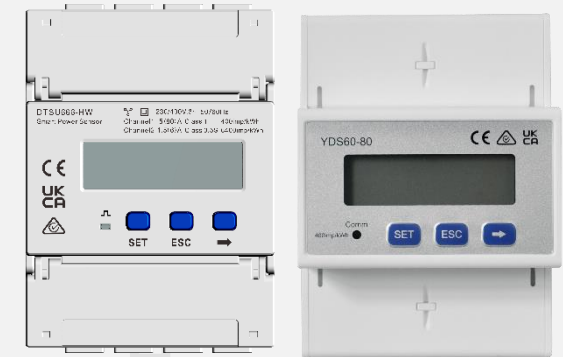

DTSU666-HW/YDS60-80  
(three phase)

- Connects to the inverter through RS485.
- Class 1 precision for power and energy
- Power control at the grid-connected point
- Built-in CT, current range 80A
- External CT is supported for current larger than 250A
- The precision of the external CT should not worse than Class 0.5.  
The current on the 2<sup>nd</sup> side should be 1 A or 5 A.
- 485 cable with 10 m length is attached with the box.



2





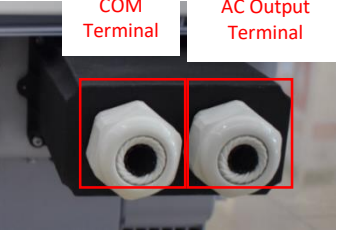
Product Key Change Point



# Key Feature Changes Summary

	SUN2000-12-20KTL-M2	SUN2000-12-25KTL-M5
Rated Power	12/15/17/20	12/15/17/20/25
Max. efficiency	98.65%	98.4%
European weighted efficiency	98.3%	98.2%
Max. input current per MPPT	27A(two stings)/18A(single string)	30A(two stings)/20A(single string)
Dimensions (W x H x D)	525*470*262(mm)	546*460*228(mm)
Weight	25kg	21kg
Cooling	natural convection	Smart air cooling
Degree of protection	IP65	IP66

# Hardware Feature Changes Summary

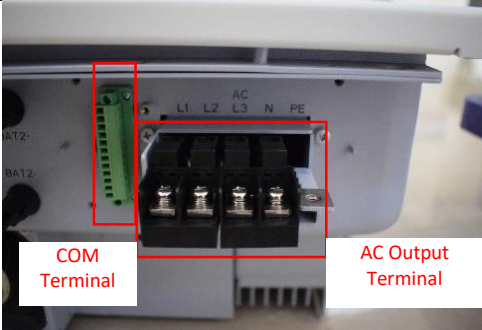Hardware difference		
	Old version	New Version
	SUN2000-8-20KTL-M2	SUN2000-12-25KTL-M5
Cooling method		
	Natural cooling	Fan at bottom, Smart air cooling
AC Connector		
	AC output aviation connector	AC output OT connector
COM & AC output terminal protection shield		
	COM & AC output terminal separated	COM & AC output terminal in one protection shield

Thank you.