

ZÁRUČNÝ LIST

DÁTUM NÁKUPU	
DORUČOVACIA ADRESA	
PODPIS / PEČIATKA	
POPIS POŠKODENIA	
KOMENTÁRE K SLUŽBÁM	

V PRÍPADE POTREBY VYPLŇTE

(*) Nesprávny krížik

☒ Súhlasím s úhradou nákladov na opravu meniča z dôvodu:

uplynutie záručnej doby / *

záruka neplatná

Pred začatím opravy vás servis telefonicky informuje o presných nákladoch na opravu.

K reklamácii priložte kópiu dokladu o kúpe (pokladničný blok alebo faktúru).

Úplné znenie pravidiel servisných opráv nájdete na našej webovej stránke www.voltpolska.pl

Správna likvidácia výrobku

(odpad z elektrických a elektronických zariadení)

Označenie umiestnené na výrobku alebo v súvisiacich textoch označuje, že sa na konci jeho životnosti nesmie likvidovať s ostatným domovým odpadom. Aby ste predišli škodlivým účinkom na životné prostredie a ľudské zdravie v dôsledku nekontrolovanej likvidácie, oddelte tento výrobok od ostatných druhov odpadu a zodpovedne ho recyklujte, aby ste podporili opätovné použitie materiálnych zdrojov ako trvalú prax. Informácie o tom, kde a ako recyklovať tento výrobok environmentálne bezpečným spôsobom, by mali získať od predajcu, u ktorého výrobok zakúpili, alebo od miestneho úradu. Firemní používatelia by sa mali obrátiť na svojho dodávateľa a overiť si zmluvné podmienky kúpnej zmluvy. Výrobok by sa nemal likvidovať s ostatným komerčným odpadom.



PRÍRUČKA K PRODUKTU

verzia 2024-03-01

AUTOMATICKÝ REGULÁTOR NAPÄTIA AC

Automatický regulátor 1000 2000 3000

5 000 a 10 000 8 % ŠTÍHLÝ



VOLT POLSKA Sp. z oo
Świemirowska ulica 3
81-877 Sopot
www.voltpolska.pl

Caution


- Avoid overloading
Do not use the regulator beyond its maximum power capacity.
- When connected to any appliance with built-in motor compressor, the starting power is generally several times of the appliance's listed power rating. Make sure that the total starting power capacity of all connected appliance does not exceed the listed maximum output power capacity of the regulator. For color TV set, calculate it twice as its listed capacity.
- Make sure that the regulator is of the same output voltage and frequency as the appliance's it connected.
- Make sure that the voltage of electrical source is within the listed input voltage range of the regulator.
- Always place the regulator in an environment that is:
 - well ventilated.
 - not exposed to direct sunlight or heat source.
 - out of reach from children.
 - away from water, moisture, oil or grease.
 - away from any flammable substance.

ČASOVÉ ONESKORENIE

INPUT VOLTAGE DISPLAY


UNUSUAL

OVERHEAT DISPLAY

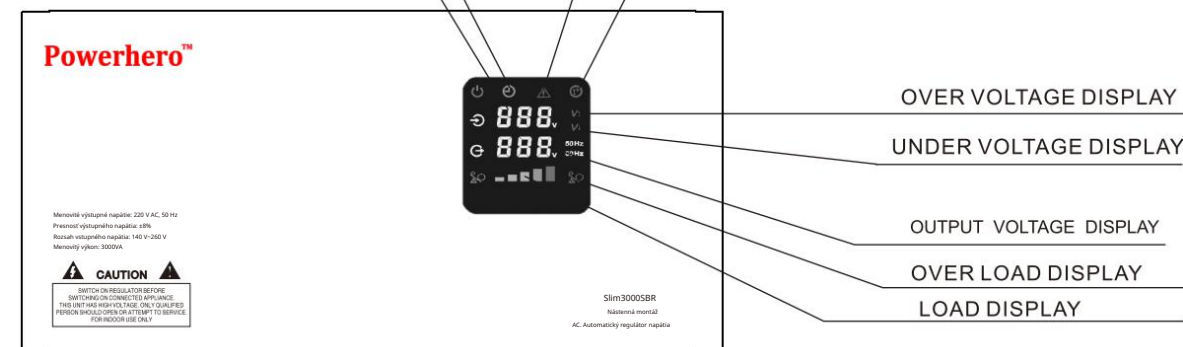


KOMBINOVANÉ BLIKANIE PRE OCHRANU AKTIVOVANÝ DISPLEJ



- Prepätie + nezvyčajné blikanie oboch zariadení pre ochranu pred vysokým napätím;
- Podpätie + nezvyčajné blikanie oboch zariadení pre ochranu pred nízkym napätím;
- Preťaženie + nezvyčajné blikanie oboch pre ochranu pred preťažením;
- Prehriatie + nezvyčajné blikanie oboch zariadení pre ochranu pred vysokou teplotou;

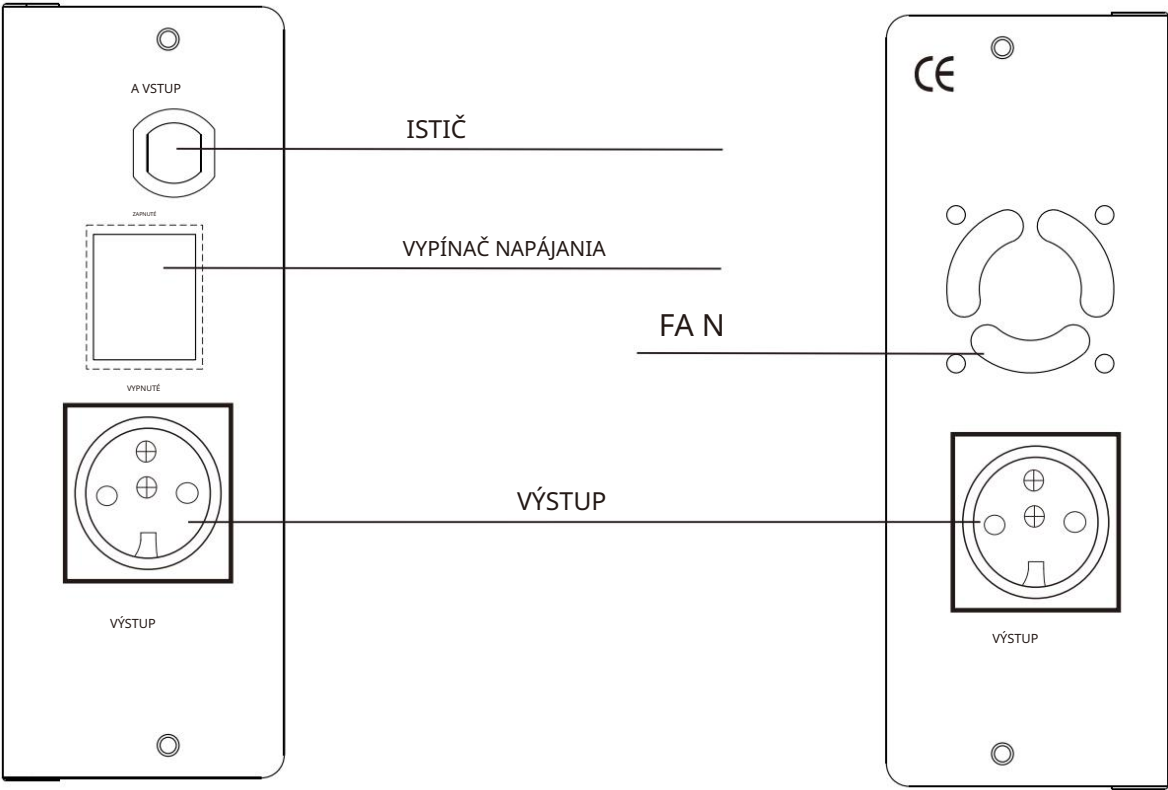

REMARK: Input plugs and output sockets could be changed as request.
Please operate refer to the practicality.

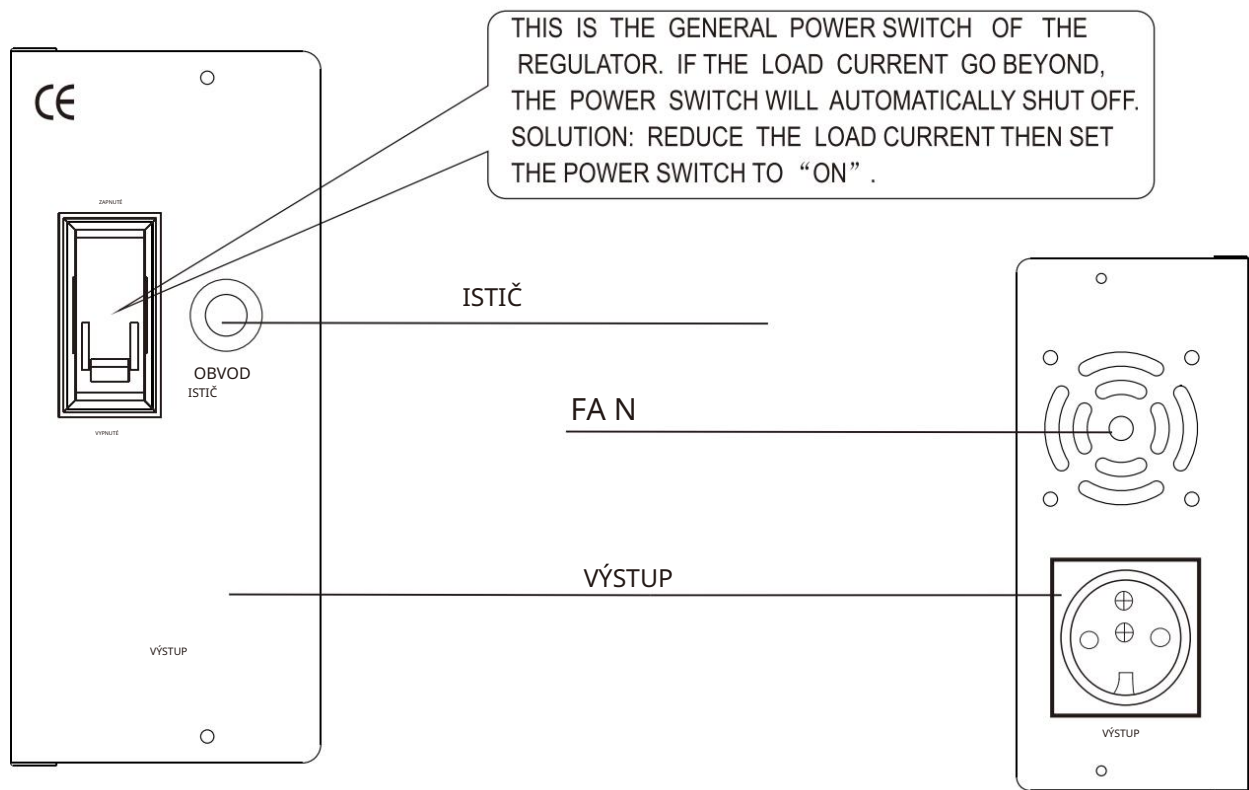



REMARK: Input plugs and output sockets could be changed as request.
Please operate refer to the practicality.

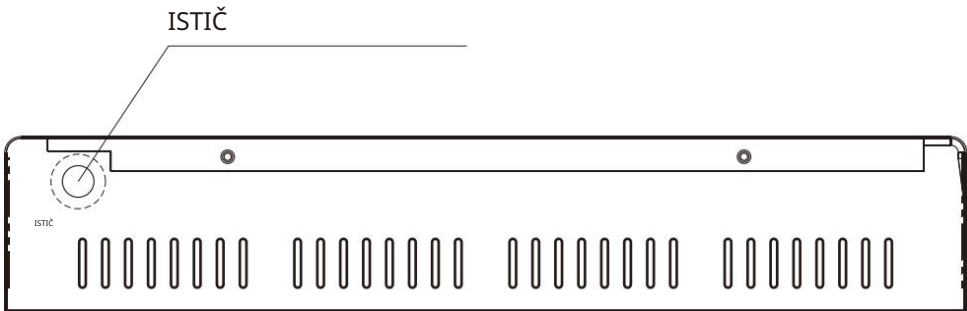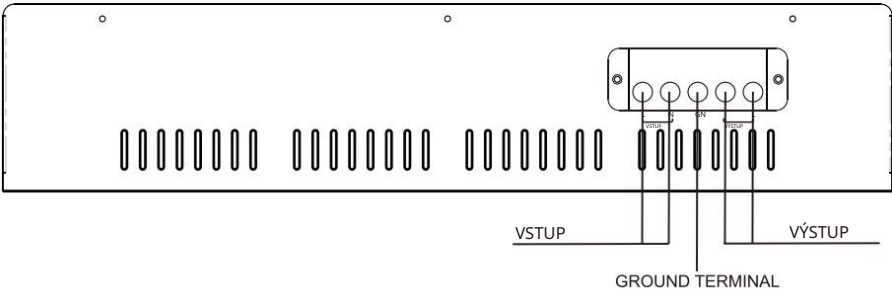

Technology Parameter

Capacity		500VA	1000VA	1500VA	2000VA	3000VA	5000VA	8000VA	10 000 VA
Input	Voltage Range	140 V-260 V							
	Frequency	50Hz/60Hz							
Output	Voltage	230 V							
	Precision	±8 %							
Delay time		6S/180S							
Protection	High Voltage Protection	Yes							
	Low Voltage Protection	Yes							
	Overload Protection	Yes							
	High Temperature Protection	Yes							
	Circuit Protection	Circuit Breaker							

THE REGULATOR'S MAXIMUM OUTPUT POWER
WILL CHANGE AS THE DIAGRAM SHOWN BELOW.

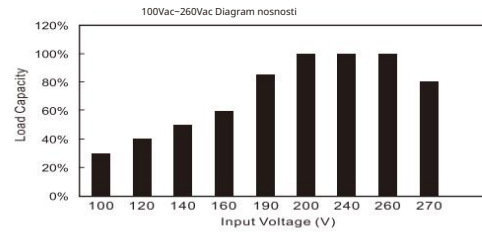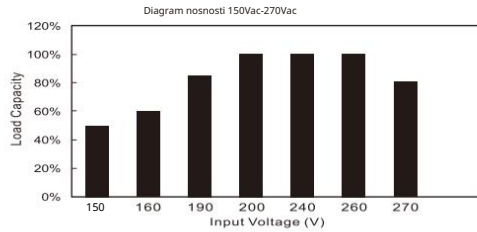

MAKE SURE THAT THE TOTAL LOAD POWER
DOES NOT EXCEED THE LISTED MAXIMUM
OUTPUT POWER OF THE REGULATOR.

★ Specification are subjected to change without prior notice.