


Solid State Relays Zero Switching Types RGS..E, RGS..EDIN

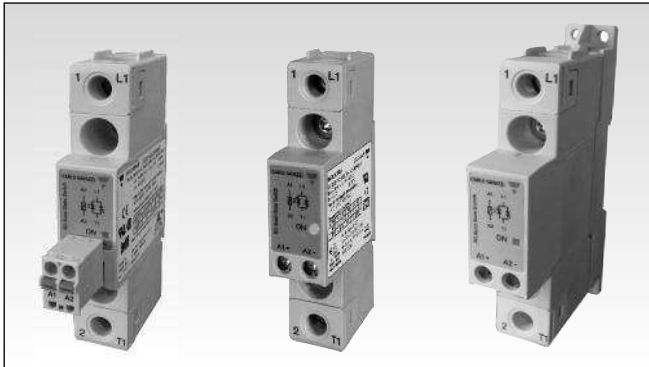

- 17.5mm width
- Rated Operational voltage: Up to 600Vrms
- Rated Operational current: Up to 90Arms
- Up to 6600A²s for I²t
- Control voltages: 3-32 VDC, 20-275 VAC (24-190VDC)
- Input connection: Screw terminal or pluggable spring
- Output connection: Screw clamp/screw terminal
- Design according to IEC/EN60947-4-2, IEC/EN60947-4-3, IEC/EN62314, UL508, CSA22.2 No. 14-10
- Integrated voltage transient protection with varistor
- RoHS compliant
- Short circuit rating: 100 kA
- VDE approval
- Option for DIN mounting (RGS...DIN)

Product Description

Aim of this solid state switching device is to switch heater loads and motor loads frequently. The range offers solutions up to 90AAC in 17.5mm width. Output connections are via a screw connection, having a captivated washer allowing for safe looping. Input connection is provided either via a screw connection having a captivated

washer or via a pluggable spring loaded input. Other options with integrated heatsink are available in RGC ranges.

The RGS...DIN provides an option for DIN mounting of the RGS series. Minimum AC51 rating @ 40°C is 10AAC.

Specifications are at a surrounding temperature of 25°C unless otherwise specified.

Ordering Key **RGS 1 A 60 D 75 K K E**

Solid state relay	_____
Number of poles	_____
Switching mode	_____
Rated operational voltage	_____
Control voltage	_____
Rated operational current	_____
Connection type for control	_____
Connection type for power	_____
Connection configuration	_____
Option	_____

Ordering Key

1Phase SSR with no heatsink	Rated Voltage	Control Voltage	Rated Current	Connection Control	Connection Power	Connection Configuration	Options
RGS1A: ZC	23: 230V +10% - 15%	D: 3 - 32 VDC (4-32VDC)	25: 25A, 1200Vp 50: 50A, 1200Vp	K: Screw M: pluggable	K: Screw	E: Contactor	HT: Thermal pad
RGS1B: IO	60: 600V +10% -15%	A: 20 - 275VAC (24-190 VDC)	51: 50A, 1600Vp 75: 75A, 1200Vp 90: 90A, 1200Vp 91: 90A, 1600Vp	spring-loaded			H51: Heatsink RHS37A DIN: DIN rail mount

Selection Guide - RGS.. (ZC = Zero Cross Switching, IO = Instant-On Switching)

Rated Output Voltage	Blocking Voltage	Connection Control/ Power	Control Voltage	Rated operational current @ 40°C			
				25 AAC	50 AAC	75 AAC	90 AAC
230VAC, ZC	800Vp	Screw/Screw	3-32VDC	RGS1A23D25KKE	RGS1A23D50KKE	RGS1A23D75KKE	-
		Spring/Screw	3-32VDC	RGS1A23D25MKE	RGS1A23D50MKE	-	-
		Screw/Screw	20-275VAC, 24-190VDC	RGS1A23A25KKE	RGS1A23A50KKE	RGS1A23A75KKE	-
		Spring/Screw	20-275VAC, 24-190VDC	RGS1A23A25MKE	RGS1A23A50MKE	-	-
600VAC, ZC	1200Vp	Screw/Screw	4-32VDC	RGS1A60D25KKE	RGS1A60D50KKE	RGS1A60D75KKE	RGS1A60D90KKE
		Spring/Screw	4-32VDC	RGS1A60D25MKE	RGS1A60D50MKE	RGS1A60D75MKE	RGS1A60D90MKE
		Screw/Screw	20-275VAC, 24-190VDC	RGS1A60A25KKE	RGS1A60A50KKE	RGS1A60A75KKE	RGS1A60A90KKE
		Spring/Screw	20-275VAC, 24-190VDC	RGS1A60A25MKE	RGS1A60A50MKE	RGS1A60A75MKE	RGS1A60A90MKE
	1600Vp	Screw/Screw	4-32VDC	-	RGS1A60D51KKE	-	RGS1A60D91KKE
		Screw/Screw	20-275VAC, 24-190VDC	-	RGS1A60A51KKE	-	RGS1A60A91KKE
		Screw/Screw	4-32VDC	RGS1B60D25KKE	RGS1B60D50KKE	RGS1B60D75KKE	RGS1B60D90KKE
		Screw/Screw	4-32VDC	RGS1B60D25KKE	RGS1B60D50KKE	RGS1B60D75KKE	RGS1B60D90KKE

Selection Guide - RGS..HT (RGS with attached Thermal Pad)¹

Rated Output Voltage	Blocking Voltage	Connection Control/ Power	Control Voltage	Rated operational current @ 40°C	
				50 AAC	90 AAC
230VAC, ZC	800Vp	Screw/Screw	3 - 32VDC	RGS1A23D50KKEHT	-
		Spring/Screw	3 - 32VDC	RGS1A23D50MKEHT	-
600VAC, ZC	1200Vp	Screw/Screw	4 - 32VDC	RGS1A60D50KKEHT	RGS1A60D90KKEHT
		Spring/Screw	4 - 32VDC	RGS1A60D50MKEHT	RGS1A60D90MKEHT

1: The thermal pad with suffix 'HT' is available with any RGS part no. upon request. The above part numbers are some examples of RGS selection with attached thermal pad.

Selection Guide - RGS..H51 (RGS mounted on heatsink RHS37A)²

Rated Output Voltage	Blocking Voltage	Connection Control/ Power	Control Voltage	Rated operational current @ 40°C	
				22 AAC	
230VAC, ZC	800Vp	Screw/Screw	3 - 32VDC	RGS1A23D50KKEH51	
		Spring/Screw	3 - 32VDC	RGS1A23D50MKEH51	
		Screw/Screw	20 - 275VAC	RGS1A23A50KKEH51	
			24 - 190VDC		
600VAC, ZC	1200Vp	Screw/Screw	4 - 32VDC	RGS1A60D50KKEH51	
		Spring/Screw	4 - 32VDC	RGS1A60D50MKEH51	
		Screw/Screw	20 - 275VAC	RGS1A60A50KKEH51	
			24 - 190VDC		

2: Any of the available RGS part nos. can be factory mounted upon request on heatsink RHS37A. The above part numbers are some examples of RGS with factory mounted heatsink.

Selection Guide - RGS..DIN (RGS for DIN Rail mounting)³

Rated Output Voltage	Blocking Voltage	Connection Control/ Power	Control Voltage	Rated operational current @ 40°C (I _{2t} value in brackets)		
				10 AAC (525A ² s)	12 AAC (1800A ² s)	12 AAC (6600A ² s)
230VAC, ZC	800Vp	Screw/Screw	3 - 32VDC	RGS1A23D25KKEDIN	RGS1A23D50KKEDIN	-
600VAC, ZC	1200Vp	Screw/Screw	4 - 32VDC	RGS1A60D25KKEDIN	RGS1A60D50KKEDIN	RGS1A60D90KKEDIN

3: Any of the available RGS part numbers can be factory mounted upon request to the RGS1DIN accessory. The above are some examples. Refer to 'Accessories' section for further details.

Output Voltage Specifications

		RGS..23..	RGS..60..
Operational Voltage Range		24-240 VAC, +10%, -15% on max	42-600 VAC, +10% -15% on max
Blocking Voltage	RGS..25/50/75/90 RGS..51/91	800Vp -	1200 Vp 1600 Vp
Internal Varistor	RGS..25/50/75/90 RGS..51/91	275V -	625V 680V

General Specifications


Latching voltage (across L1-T1)	≤20V	Pollution degree	2 (non-conductive pollution with possibilities of condensation)
Operational frequency range	45 to 65Hz	Over-voltage category	III (fixed installations)
Power factor	> 0.5 @ Vrated	Isolation Input to Output Input&Output to Case	4000Vrms 4000Vrms
CE marking	Yes		
Touch Protection	IP20		
Control input status	continuously ON Green LED, when control input is applied		

Input Specifications (@ 25°C unless otherwise specified)


		RGS..D.. ⁴	RGS..A..
Control voltage range	RGS..23..	3 - 32 VDC	20 - 275 VAC, 24 (-10%) - 190 VDC
	RGS..60..	4 - 32 VDC	20 - 275 VAC, 24 (-10%) - 190 VDC
Pick-up voltage	RGS..23.. RGS..60..	3.0 VDC 3.8 VDC	20 VAC/DC
Drop-out voltage	RGS..23.. RGS..60..	1 VDC 1 VDC	5 VAC/DC
Maximum Reverse voltage		32 VDC	-
Response time pick-up ZC (RGS1A..)		0.5 cycle + 500µs @ 24VDC	2 cycles @ 230VAC/110VDC
Response time pick-up IO (RGS1B..)		350µs @ 24 VDC	N/A
Response time drop-out		0.5 cycle + 500µs @ 24VDC	0.5 cycle + 40ms @ 230 VAC/ 110 VDC
Input current @ 40°C		See diagrams below	See diagrams below

4: DC control to be supplied by a Class 2 power source

RG..D..

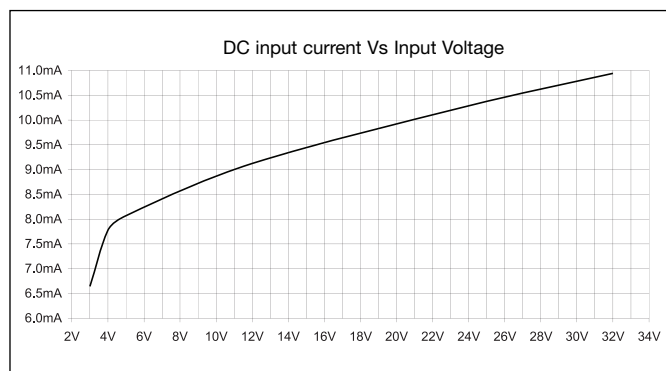

RG..A..

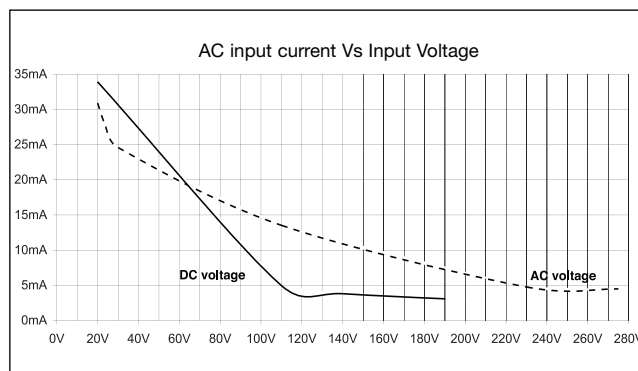

Motor Ratings⁵: HP (UL508) / kW (EN/IEC60947-4-2) @ 40°C

	115 VAC	230 VAC	400 VAC	480 VAC	600 VAC
RGS..25	½HP / 0.18kW	1-½HP / 0.37kW	3HP / 0.75kW	3HP / 1.1kW	5HP / 1.5kW
RGS..50/51	1HP / 0.37kW	3HP / 1.1kW	5HP / 1.5kW	5HP / 2.2kW	7-½HP / 3.7kW
RGS..75	1-½HP / 0.56kW	3HP / 1.5kW	5HP / 3kW	7-½HP / 4kW	10HP / 4kW
RGS..90/91	2HP / 0.75kW	5HP / 2.2kW	7-½HP / 4kW	10HP / 4kW	15HP / 5.5kW

5: Refer to heatsink selection table

Output Specifications

	RGS..25..	RGS..50/51..	RGS..75..	RGS..90/91..
Rated operational current AC51 @ Ta=40°C (IEC60947-4-3/UL508) ⁵	25 AAC	50 AAC	75 AAC	90 AAC
AC-53a rating @ Ta=40°C (IEC60947-4-2/ UL508)	5 AAC	10 AAC	14.8 AAC	18 AAC
Number of motor starts (x:6, Tx:6s, F:50%) at 40°C ^{5, 6}	30	30	30	30
Min. operational current	150 mAAC	250 mAAC	400 mAAC	400 mAAC
Rep. overload current - UL508: T _{AMB} =40°C, t _{ON} =1s, t _{OFF} =9s, 50cycles	67 AAC	107 AAC	126 AAC	168 AAC
Maximum Transient Surge Current (I _{TSM}), t=10ms	325Ap	600Ap	800Ap	1150Ap
Maximum Off-state leakage current @ rated voltage	3 mAAC	3 mAAC	3 mAAC	3 mAAC
I ² t for fusing (t=10ms) Minimum	525 A ² s	1800A ² s	3200A ² s	6600A ² s
Critical dv/dt (@ T _j init = 40°C)	1000V/us	1000V/us	1000V/us	1000V/us


6 x: multiple of AC-53a current rating, Tx: duration of current surge, F: duty cycle.

Output Specifications for RGS..DIN


	RGS..25..DIN	RGS..50..DIN	RGS..90..DIN
Rated operational current ⁷ AC51 @ Ta = 40°C	10 AAC	12 AAC	12 AAC
Min. operational current	150 mA	250 mA	400 mA
Maximum transient surge current I _{TSM} , t=10ms	325Ap	600Ap	1150Ap
Maximum Off-state leakage current @ rated voltage	3 mAAC	3 mAAC	3 mAAC
I ² t for fusing (t=10ms) Minimum	525 A ² s	1800 A ² s	6600 A ² s
Critical dv/dt (@ T _j init = 40°C)	1000V/us	1000V/us	1000V/us

7: Refer to Derating Curves


Derating Curves for RGS...DIN

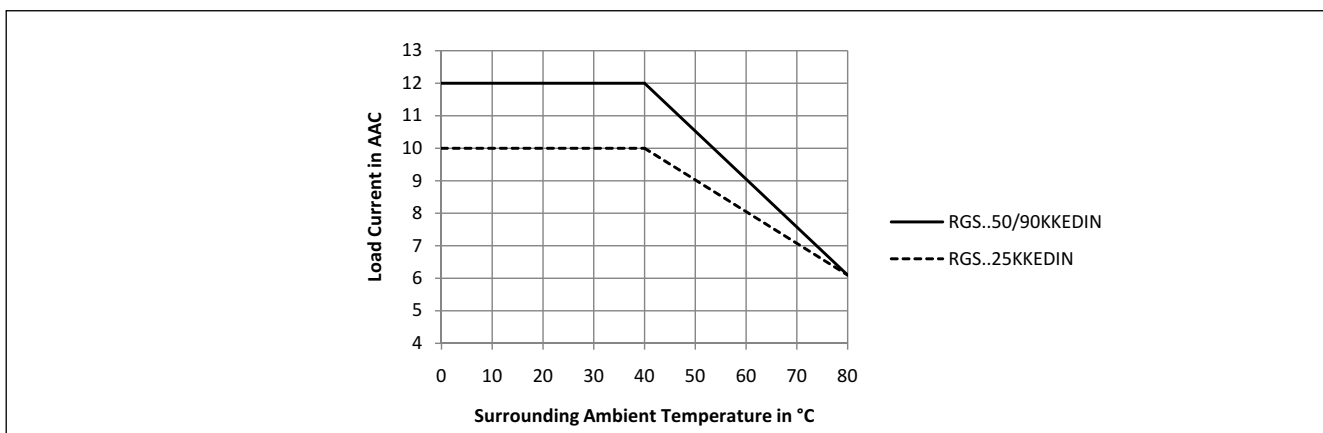

Derating vs. Spacing Curves for RGS...DIN

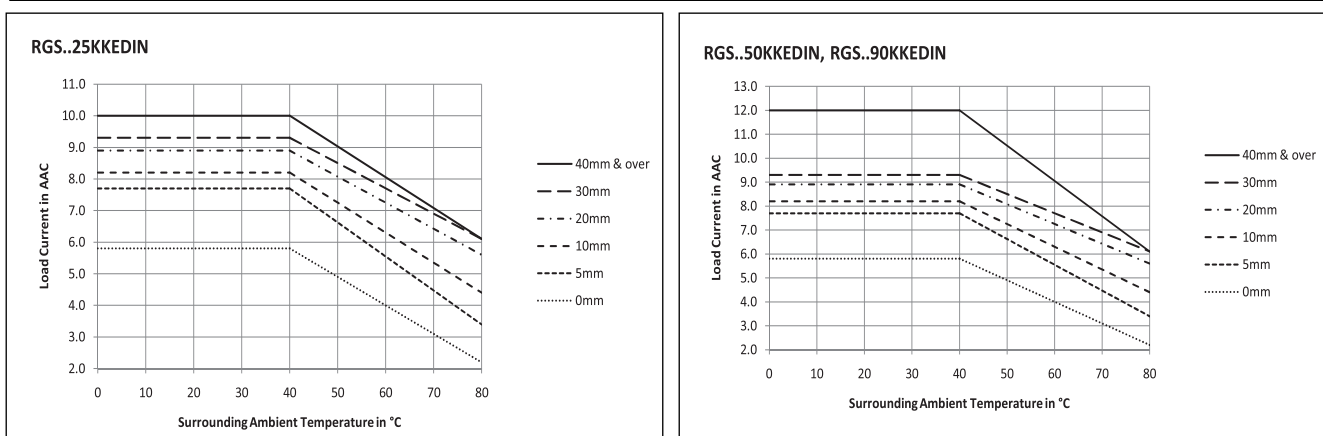

Output Power Dissipation

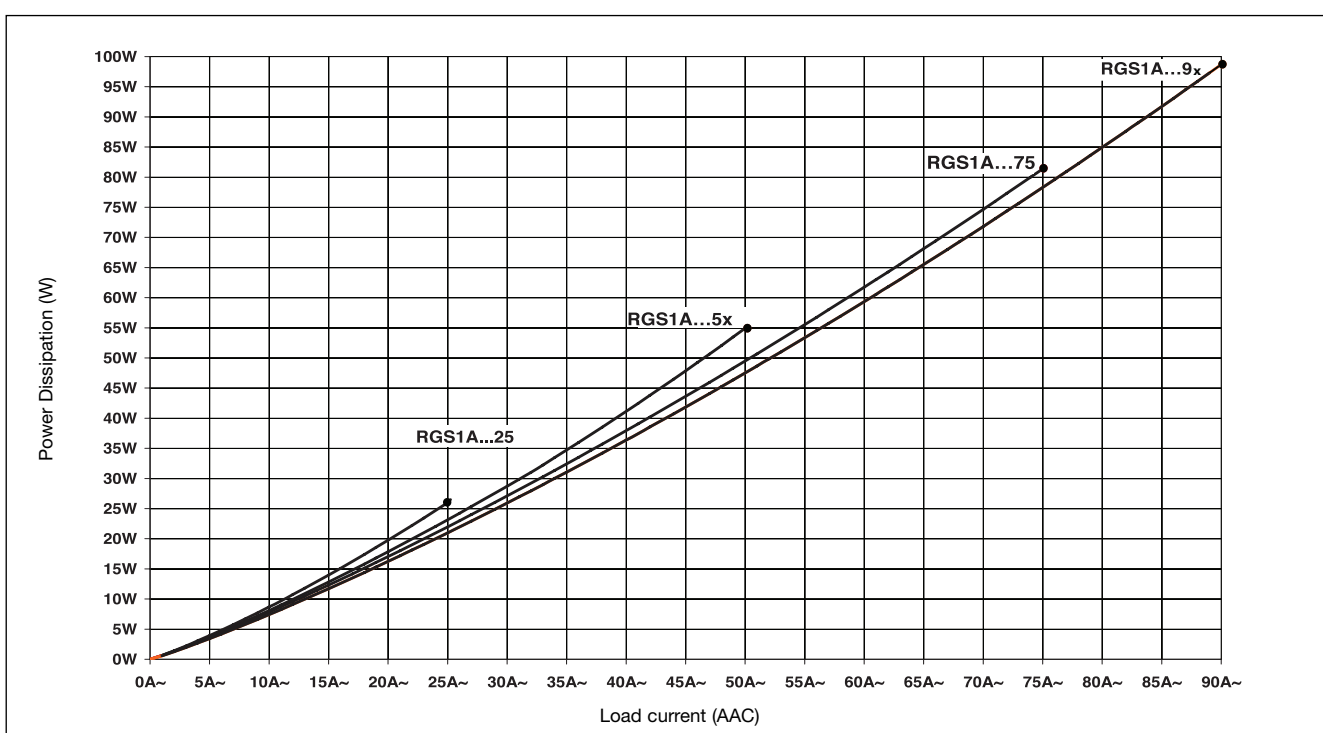

Electromagnetic Compatibility

EMC Immunity	IEC/EN 61000-6-2	Radiated Radio Frequency Immunity	IEC/EN 61000-4-3
Electrostatic Discharge (ESD) Immunity	IEC/EN 61000-4-2	10V/m, 80 - 1000 Mhz	Performance Criteria 1
Air discharge, 8kV	Performance Criteria 1	10V/m, 1.4 - 2.0GHz	Performance Criteria 1
Contact, 4kV	Performance Criteria 1	3 V/m, 2.0 - 2.7GHz	Performance Criteria 1
Electrical Fast Transient (Burst) Immunity	IEC/EN 61000-4-4	Conducted Radio Frequency Immunity	IEC/EN 61000-4-6
Output: 2kV, 5kHz	Performance Criteria 1	10V/m, 0.15 - 80 MHz	Performance Criteria 1
Input: 1kV, 5kHz	Performance Criteria 1	Voltage Dips Immunity	IEC/EN 61000-4-11
Electrical Surge Immunity	IEC/EN 61000-4-5	0% for 10ms/20ms	Performance Criteria 2
Output, line to line, 1kV	Performance Criteria 1	40% for 200ms	Performance Criteria 2
Output, line to earth, 2kV	Performance Criteria 1	70% for 500ms	Performance Criteria 2
Input, line to line, 1kV	Performance Criteria 2	Voltage Interruptions Immunity	IEC/EN 61000-4-11
Input, line to earth, 2kV	Performance Criteria 2	0% for 5000ms	Performance Criteria 2
EMC Emission	IEC/EN 61000-6-4	Radio Interference	
Radio Interference		Field Emission (Radiated)	IEC/EN 55011
Voltage Emission (Conducted)	IEC/EN 55011	30 - 1000MHz	Class A (industrial)
0.15 - 30MHz	Class A (industrial) with filters - see filter information IEC/EN 60947-4-2, 60947-4-3 Class A (no filtering needed)		


Filtering - IEC/EN 55011 Class A compliance (for class B compliance contact us)

Part Number	Suggested filter for compliance	Maximum Heater current
RGS1A23..25	100 nF / 275 V / X1	25 A
RGS1A23..50	220 nF / 275 V / X1	30 A
	330 nF / 275 V / X1	35 A
RGS1A23..51	150 nF / 275 V / X1	20 A
	220 nF / 275 V / X1	35 A
RGS1A23..75	330 nF / 275 V / X1	35 A
RGS1A23..90/91	330 nF / 275 V / X1	35 A
RGS1A60..25	150 nF / 760 V / X1	25 A
	220 nF / 760 V / X1	30 A
RGS1A60..50	330 nF / 760 V / X1	30 A
RGS1A60..51	220 nF / 760 V / X1	30 A
RGS1A60..75	220 nF / 760 V / X1	30 A
RGS1A60..90/91	220 nF / 760 V / X1	30 A

Note:




- Control input lines must be installed together to maintain products' susceptibility to Radio Frequency interference. Use of AC solid state relays may, according to the application and the load current, cause conducted radio interferences. Use of mains filters may be necessary for cases where the user must meet E.M.C requirements. The capacitor values given inside the filtering specification tables should be taken only as indications, the filter attenuation will depend on the final application. DC input type require surge suppression for full compliance to EN55011.
- Performance Criteria 1: No degradation of performance or loss of function is allowed when the product is operated as intended.
- Performance Criteria 2: During the test, degradation of performance or partial loss of function is allowed. However when the test is complete the product should return operating as intended by itself.
- Performance Criteria 3: Temporary loss of function is allowed, provided the function can be restored by manual operation of the controls.

Filter Connection diagram



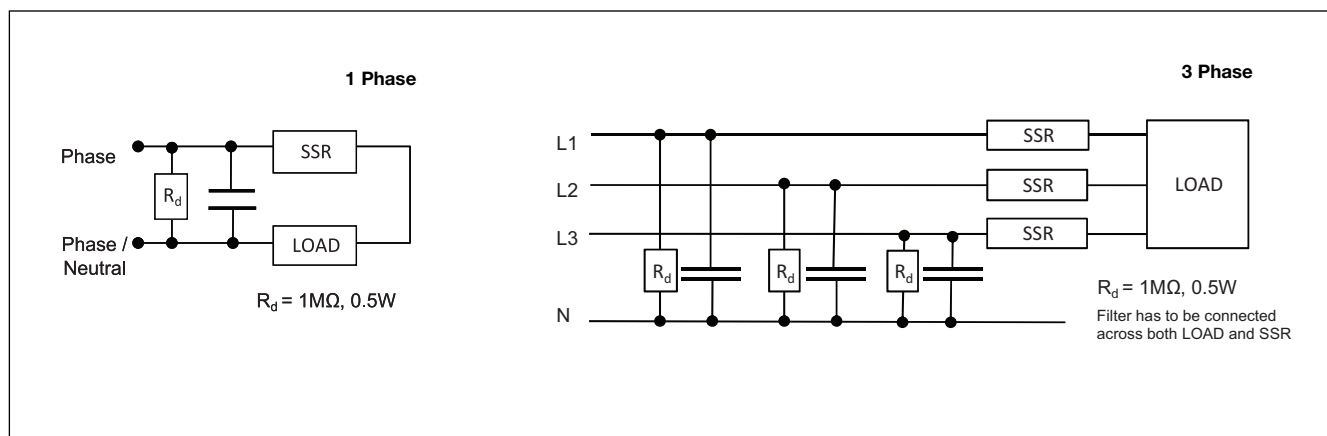


Terminal Layout and Dimensions

RGS....KKE



RGSMKE

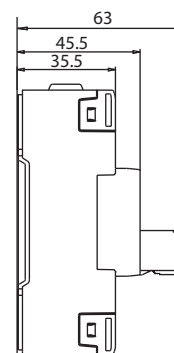




1/L1: Supply connection
 2/T1: Load connection
 A1 (+): Positive control signal
 A2 (-): Control ground




* Housing width tolerance +0.5mm, -0mm...as per DIN43880
 All dimensions in mm

Terminal Layout and Dimensions (cont.)

RGS....KKEDIN

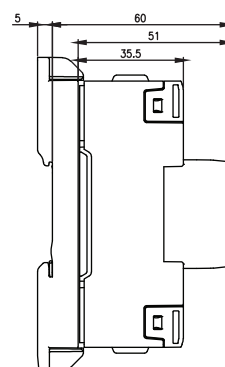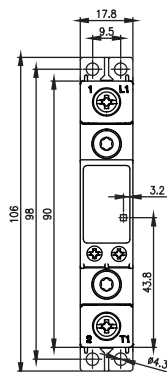

RGSMKEDIN

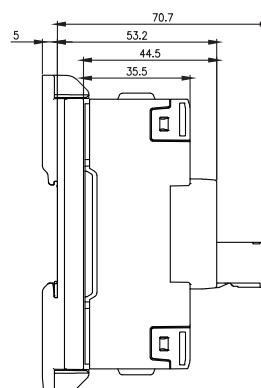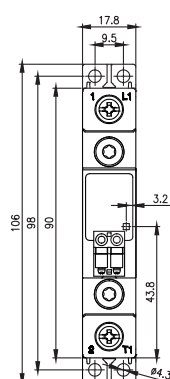

1/L1: Supply connection
 2/T1: Load connection
 A1 (+): Positive control signal
 A2 (-): Control ground

* Housing width tolerance +0.5mm, -0mm...as per DIN43880
 All dimensions in mm

Connection Specifications

POWER CONNECTIONS: 1/L1, 2 /T1




Torque specifications



2 Nm (17.7 in-lb)
M4, Pozidriv 2
Use 75°C copper (Cu)
conductors
Stripping Length (X) = 12mm

Rigid (Solid & Stranded)

UL/ CSA rated data



2 x 2.5..6 mm² 1 x 2.5..6 mm²
2 x 14..10 AWG 1 x 14..10 AWG

Flexible with end sleeve



2 x 1.0...2.5mm²
2 x 2.5...4mm² 1 x 1.0...4mm²
2 x 18...14 AWG 1 x 18...12AWG
2 x 14...12AWG

Flexible without end sleeve



2 x 1.0...2.5mm²
2 x 2.5..6 mm² 1 x 1.0...6 mm²
2 x 18 ...14AWG 1 x 18...10AWG
2 x 14...10AWG

Aperture for termination lug

12.3mm

CONTROL CONNECTIONS: A1(+), A2(-) for RGS...KKE




Torque specifications



0.5 Nm (4.4 in-lb)
M3, Pozidriv 1
Use 60/75°C copper (Cu)
conductors
Stripping Length (X) = 8mm

Rigid (Solid & Stranded)

UL/ CSA rated data



2 x 0.5..2.5mm² 1 x 0.5..2.5mm²
2 x 18..12 AWG 1 x 18..12 AWG

Flexible with end sleeve



2 x 0.5..2.5mm² 1 x 0.5..2.5mm²
2 x 18..12AWG 1 x 18..12AWG

CONTROL CONNECTIONS: A1(+), A2(-) for RGS...MKE


Use 60/75°C copper (Cu) conductors

Stripping Length (X)

12 - 13mm

Rigid (Stranded)

UL/ cUL rated data



1 x 0.2...2.5mm²
1 x 24 ... 12 AWG

Environmental Specifications


Operating Temperature	-40°C to 80°C (-40°F to +176°F)	Relative humidity	95% non-condensing @ 40°C
Storage Temperature	-40°C to 100°C (-40°F to +212°F)	UL flammability rating (housing)	UL 94 V0
RoHS (2002/95/EC)	Compliant	Installation altitude	0-1000m. Above 1000m derate linearly by 1% of FLC per 100m up to a maximum of 2000m
Impact resistance (EN 50155, EN 61373)	15/11 g/ms		
Vibration resistance (2-100Hz, IEC60068-2-26, EN 50155, EN 61373)	5g per axis		

Agency Approvals and Conformances


Conformance	IEC/EN 62314 IEC/EN 60947-4-2 IEC/EN 60947-4-3	Agency Approvals	UL508 Recognised (E172877) CSA 22.2 No.14-10 (204075) VDE (0660-109)
		Short Circuit Current rating	100kA, UL508



Connection Diagram



In AC controlled types only (RG..A..) a varistor is placed across A1/A2 terminals.



In DC controlled types only (RG..D..) a diode is placed in series with the control circuit for protection against reverse biased connection.

Heatsink Selection

RGS1...25

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
25.0	3.11	2.72	2.33	1.94	1.55	1.17	0.78	25.7
22.5	3.55	3.10	2.66	2.22	1.77	1.33	0.89	22.6
20.0	4.10	3.59	3.08	2.56	2.05	1.54	1.03	19.5
17.5	4.83	4.23	3.63	3.02	2.42	1.81	1.21	16.6
15.0	5.83	5.10	4.37	3.64	2.91	2.18	1.46	13.7
12.5	7.24	6.34	5.43	4.53	3.62	2.72	1.81	11.0
10.0	9.43	8.25	7.07	5.89	4.71	3.54	2.36	8.5
7.5	13.17	11.53	9.88	8.23	6.59	4.94	3.29	6.1
5.0	20.97	18.35	15.73	13.11	10.49	7.86	5.24	3.8
2.5	45.89	40.15	34.42	28.68	22.94	17.21	11.47	1.7
20 30 40 50 60 70 80 T _A								
Ambient temp [°C]								

RGS1...5x

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
50.0	1.45	1.28	1.06	0.87	0.68	0.49	0.30	52.8
45.0	1.72	1.50	1.29	1.07	0.85	0.64	0.42	46.3
40.0	2.00	1.75	1.50	1.25	1.00	0.75	0.50	40.0
35.0	2.35	2.06	1.76	1.47	1.18	0.88	0.59	34.0
30.0	2.83	2.48	2.13	1.77	1.42	1.06	0.71	28.2
25.0	3.52	3.08	2.64	2.20	1.76	1.32	0.88	22.7
20.0	4.58	4.01	3.44	2.86	2.29	1.72	1.15	17.5
15.0	6.40	5.60	4.80	4.00	3.20	2.40	1.60	12.5
10.0	10.19	8.92	7.64	6.37	5.10	3.82	2.55	7.8
5.0	22.30	19.51	16.72	13.94	11.15	8.36	5.57	3.6
20 30 40 50 60 70 80 T _A								
Ambient temp [°C]								

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.45 K/W
Case to heatsink thermal resistance, R _{thcs} ⁸	< 0.25 K/W

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.3 K/W
Case to heatsink thermal resistance, R _{thcs} ⁸	< 0.25 K/W

Heatsink Selection (cont.)

RGS1...75

Load current [A]	Thermal resistance [K/W]						Power dissipation [W]
	20	30	40	50	60	70	80
75.0	0.80	0.68	0.55	0.43	0.30	0.18	0.06
67.5	0.99	0.84	0.70	0.56	0.42	0.28	0.14
60.0	1.22	1.06	0.89	0.73	0.56	0.40	0.24
52.5	1.53	1.33	1.14	0.95	0.76	0.56	0.37
45.0	1.86	1.63	1.40	1.16	0.93	0.70	0.47
37.5	2.32	2.03	1.74	1.45	1.16	0.87	0.58
30.0	3.01	2.64	2.26	1.88	1.51	1.13	0.75
22.5	4.21	3.68	3.16	2.63	2.10	1.58	1.05
15.0	6.68	5.85	5.01	4.18	3.34	2.51	1.67
7.5	14.53	12.71	10.89	9.08	7.26	5.45	3.63
	T _A						Ambient temp [°C]

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.25 K/W
Case to heatsink thermal resistance, R _{thcs} ⁸	< 0.25 K/W

RGS1...9x

Load current [A]	Thermal resistance [K/W]						Power dissipation [W]
	20	30	40	50	60	70	80
90.0	0.62	0.52	0.41	0.31	0.21	0.11	0.01
81.0	0.77	0.66	0.54	0.42	0.31	0.19	0.07
72.0	0.97	0.83	0.70	0.56	0.43	0.29	0.16
63.0	1.23	1.07	0.91	0.75	0.59	0.43	0.27
54.0	1.55	1.35	1.16	0.97	0.77	0.58	0.39
45.0	1.93	1.69	1.45	1.21	0.97	0.73	0.48
36.0	2.53	2.21	1.89	1.58	1.26	0.95	0.63
27.0	3.55	3.11	2.66	2.22	1.77	1.33	0.89
18.0	5.67	4.97	4.26	3.55	2.84	2.13	1.42
9.0	12.46	10.90	9.34	7.79	6.23	4.67	3.11
	T _A						Ambient temp [°C]

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.20 K/W
Case to heatsink thermal resistance, R _{thcs} ⁸	< 0.25 K/W

8: Thermal resistance case to heatsink valves are applicable upon application of a fine layer of silicon based thermal paste HTS02S from Electrolube between SSR and heatsink.

Mounting Instructions

Thermal stress will reduce the lifetime of the SSR. Therefore it is necessary to select the appropriate heatsinks, taking into account the surrounding temperature, load current and the duty cycle.

A fine layer of thermally conductive silicone paste must be evenly applied to the back of the SSR. RGS should be mounted on the heatsink with two M5 x 30mm screws. Gradually tighten each screw (alternating between the two)

until both are tightened with a torque of 0.75Nm. Then tighten both screws to their final mounting torque of 1.5Nm.

In case of a thermal pad attached to the back of the SSR, no thermal paste is required. The RGS is gradually tightened (altering between the 2 screws) to a maximum torque of 1.5Nm.

Heatsink Selection for RGS...HT

RGS1...25..HT

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
	20	30	40	50	60	70	80	T _A
25.0	2.73	2.34	1.95	1.56	1.18	0.79	0.40	25.7
22.5	3.30	2.86	2.42	1.97	1.53	1.09	0.64	22.6
20.0	4.04	3.52	3.01	2.50	1.98	1.47	0.96	19.5
17.5	4.83	4.23	3.63	3.02	2.42	1.81	1.21	16.6
15.0	5.83	5.10	4.37	3.64	2.91	2.18	1.46	13.7
12.5	7.24	6.34	5.43	4.53	3.62	2.72	1.81	11.0
10.0	9.43	8.25	7.07	5.89	4.71	3.54	2.36	8.5
7.5	13.17	11.53	9.88	8.23	6.59	4.94	3.29	6.1
5.0	20.97	18.35	15.73	13.11	10.49	7.86	5.24	3.8
2.5	45.89	40.15	34.42	28.68	22.94	17.21	11.47	1.7

RGS1...5x..HT

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
	20	30	40	50	60	70	80	T _A
50.0	0.84	0.65	0.46	0.27	0.08	---	---	52.8
45.0	1.12	0.90	0.69	0.47	0.25	0.04	---	46.3
40.0	1.47	1.22	0.97	0.72	0.47	0.22	---	40.0
35.0	1.94	1.64	1.35	1.06	0.76	0.47	0.17	34.0
30.0	2.57	2.22	1.86	1.51	1.15	0.80	0.44	28.2
25.0	3.48	3.03	2.59	2.15	1.71	1.27	0.83	22.7
20.0	4.58	4.01	3.44	2.86	2.29	1.72	1.15	17.5
15.0	6.40	5.60	4.80	4.00	3.20	2.40	1.60	12.5
10.0	10.19	8.92	7.64	6.37	5.10	3.82	2.55	7.8
5.0	22.30	19.51	16.72	13.94	11.15	8.36	5.57	3.6

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.45 K/W
Case to heatsink thermal resistance, R _{thcs}	< 0.9 K/W

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.3 K/W
Case to heatsink thermal resistance, R _{thcs}	< 0.85 K/W

RGS1...75..HT

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
	20	30	40	50	60	70	80	T _A
75.0	0.25	0.13	0.00	---	---	---	---	80.7
67.5	0.44	0.29	0.15	0.01	---	---	---	70.7
60.0	0.67	0.51	0.34	0.18	0.01	---	---	61.0
52.5	0.98	0.78	0.59	0.40	0.21	0.01	---	51.8
45.0	1.39	1.16	0.93	0.70	0.46	0.23	---	42.9
37.5	1.99	1.70	1.41	1.12	0.83	0.54	0.25	34.5
30.0	2.91	2.53	2.15	1.78	1.40	1.02	0.65	26.5
22.5	4.21	3.68	3.16	2.63	2.10	1.58	1.05	19.0
15.0	6.68	5.85	5.01	4.18	3.34	2.51	1.67	12.0
7.5	14.53	12.71	10.89	9.08	7.26	5.45	3.63	5.5

RGS1...9x..HT

Load current [A]	Thermal resistance [K/W]							Power dissipation [W]
	20	30	40	50	60	70	80	T _A
90.0	0.07	---	---	---	---	---	---	98.4
81.0	0.22	0.11	---	---	---	---	---	85.9
72.0	0.42	0.28	0.15	0.01	---	---	---	74.0
63.0	0.68	0.52	0.36	0.20	0.04	---	---	62.5
54.0	1.03	0.84	0.65	0.45	0.26	0.06	---	51.7
45.0	1.54	1.30	1.05	0.81	0.57	0.33	0.09	41.4
36.0	2.32	2.00	1.69	1.37	1.05	0.74	0.42	31.6
27.0	3.55	3.11	2.66	2.22	1.77	1.33	0.89	22.5
18.0	5.67	4.97	4.26	3.55	2.84	2.13	1.42	14.1
9.0	12.46	10.90	9.34	7.79	6.23	4.67	3.11	6.4

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.25 K/W
Case to heatsink thermal resistance, R _{thcs}	< 0.80 K/W

Maximum junction temperature	125°C
Heatsink temperature	100°C
Junction to case thermal resistance, R _{thjc}	<0.20 K/W
Case to heatsink thermal resistance, R _{thcs}	< 0.80 K/W

Short Circuit Protection

Protection Co-ordination, Type 1 vs Type 2:

Type 1 protection implies that after a short circuit, the device under test will no longer be in a functioning state. In type 2 co-ordination the device under test will still be functional after the short circuit. In both cases, however the short circuit has to be interrupted. The fuse between enclosure and supply shall not open. The door or cover of the enclosure shall not be blown open. There shall be no damage to conductors or terminals and the conductors shall not separate from terminals. There shall be no breakage or cracking of insulating bases to the extent that the integrity of the mounting of live parts is impaired. Discharge of parts or any risk of fire shall not occur.

The product variants listed in the table hereunder are suitable for use on a circuit capable of delivering not more than 100,000A rms Symmetrical Amperes, 600Volts maximum when protected by fuses. Tests at 100,000A were performed with Class J, fast acting; please refer to the table below for maximum allowed ampere rating of the fuse. Use fuses only.

Co-ordination type 1 (UL508)

Part no.	Max. fuse size [A]	Class	Current [kA]	Voltage [VAC]
RGS..25	30	J	100	Max. 600
RGS..50 / 51	30	J	100	Max. 600
RGS..75	30	J	100	Max. 600
RGS..90 / 91	30	J	100	Max. 600

Note: For the RGS..50,51,75,71,90,91, the fuse rating are according to the motor rating as required by the UL standard.

Co-ordination type 2 (IEC/EN 60947-4-2/ -4-3)

Part No.	Ferraz Shawmut		Siba		Current [kA]	Voltage [VAC]
	Max fuse size [A]	Part number	Max fuse size [A]	Part number		
RGS..25	32	6.9xx CP URD 22x58/32, (xx=00 or 21)	32	50 142 06.32	100	Max. 600
RGS..50	50	A70QS50-4	50	50 142 06.50	100	Max. 600
RGS..51	50	A70QS50-4	-	-	100	Max. 600
RGS..75	80	A70QS80-4	80	50 194 20.80	100	Max. 600
RGS..90/91	100	A70QS100-4	100	50 194 20.100	100	Max. 600

Protection with Miniature Circuit Breakers

Solid State Relay type	Model no. for Z - type M. C. B. (rated current)	Model no. for B - type M. C. B. (rated current)	Wire cross sectional area [mm ²]	Minimum length of Cu wire conductor [m] ⁹
RGS..25	S201 - Z4 (4A) S201 - Z6 UC (6A)	S201 - B2 (2A) S201 - B2 (2A)	1.0	21.0
			1.0	21.0
			1.5	31.5
RGS..50 RGS..51	S201 - Z10 (10A)	S201-B4 (4A)	1.0	7.6
			1.5	11.4
			2.5	19.0
	S201 - Z16 (16A)	S201-B6 (6A)	1.0	5.2
			1.5	7.8
			2.5	13.0
			4.0	20.8
	S201 - Z20 (20A)	S201-B10 (10A)	1.5	12.6
			2.5	21.0
	S201 - Z25 (25A)	S201-B13 (13A)	2.5	25.0
			4.0	40.0
	S202 - Z25 (25A)	S202-B13 (13A)	2.5	19.0
			4.0	30.4
RGS..75	S201 - Z25 (25A)	S201-B13 (13A)	2.5	7.0
			4.0	11.2
			6.0	16.8
RGS...90, RGS...91	S201 - Z20 (20A)	S201-B10 (10A)	1.5	4.2
			2.5	7.0
			4.0	11.2
	S202 - Z20 (20A)	S202-B10 (10A)	1.5	1.8
			2.5	3.0
			4.0	4.8
	S201 - Z32 (32A)	S201-B16 (16A)	2.5	13.0
			4.0	20.8
			6.0	31.2
	S202 - Z32 (32A)	S202-B16 (16A)	2.5	5.0
			4.0	8.0
			6.0	12.0
			10.0	20.0
	S202 - Z50 (50A)	S202-B25 (25A)	4.0	14.8
			6.0	22.2
			10.0	37.0

9. Between MCB and Load (including return path which goes back to the mains).

Note: A prospective current of 6kA and a 230/400V power supply system is assumed for the above suggested specifications. For cables with different cross section than those mentioned above please consult Carlo Gavazzi's Technical Support Group.

Accessories

Heatsink RHS37A



Ordering Key


Heatsink with
DIN rail clip

RHS37A

Factory mounted
heatsink to RGS

RGS....H51


RHS37A Dimensions

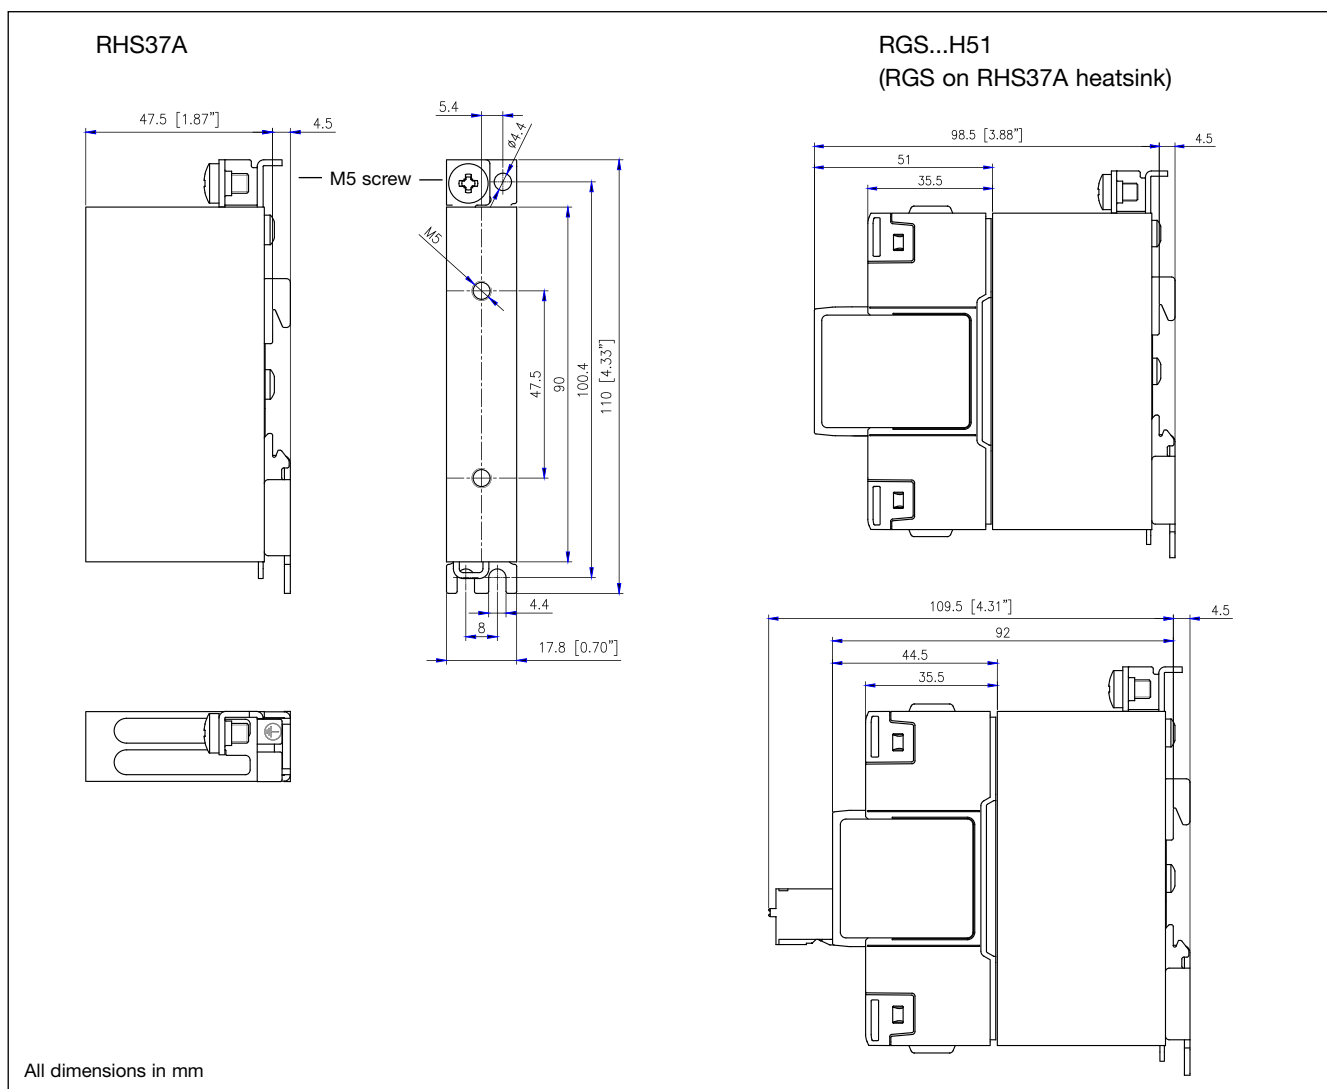


Note: M5 PE screw not provided with SSR. Maximum mounting torque 1.5Nm (13.3 in-lb).
PE connection required when product is intended to be used in Class 1 applications according to EN/IEC 61140.

Accessories (cont.)

Derating Curves (RGS assembled to heatsink RHS37A)

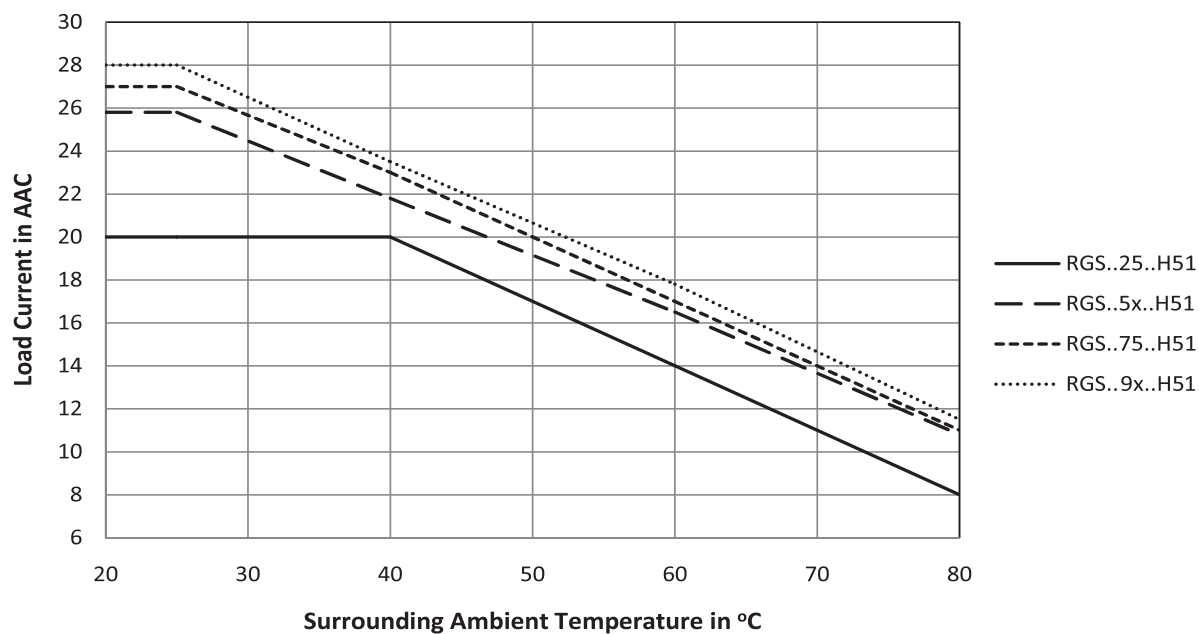

RHS37A Thermal Resistance Curve

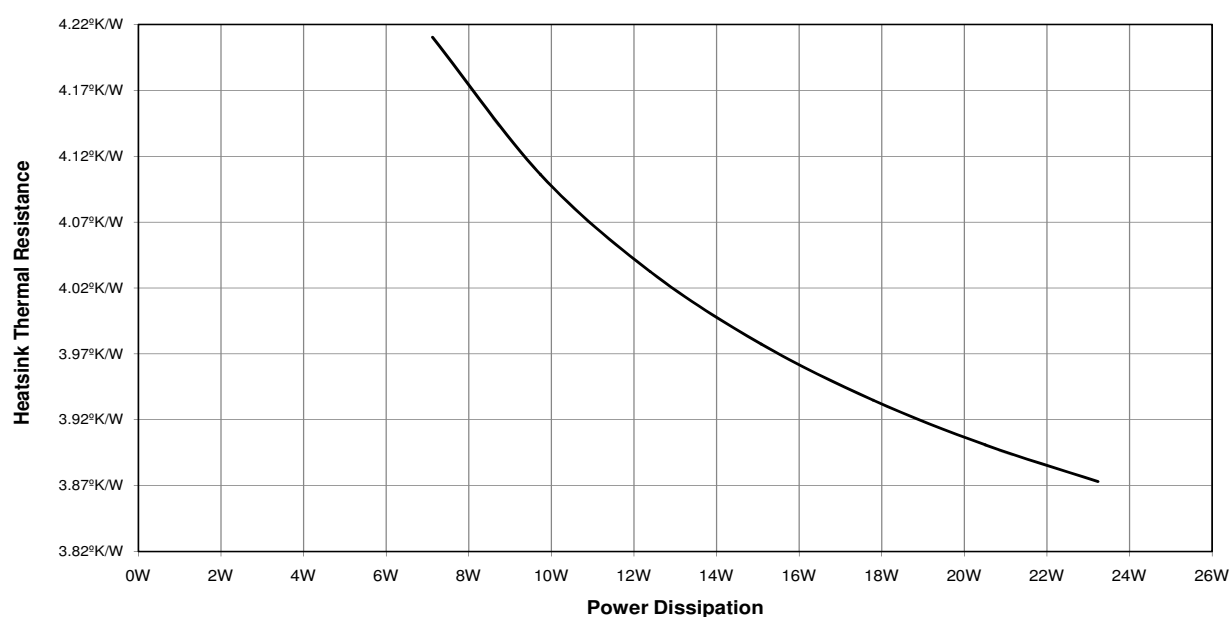

Accessories (cont.)

RG DIN Clip



Ordering Key

DIN clip mounted
to RGS


RGS....DIN

DIN clip accessory


RGS1DIN

This DIN Clip accessory can be mounted to any RGS model and will enable the RGS to be DIN rail mount. Minimum current rating @ 40°C is 10AAC. Refer to 'Current Derating' section. Gradually tighten the SSR, alternating between the 2 screws, to a maximum torque of 1.5Nm.


Mounting Instructions for RGS1DIN to RGS

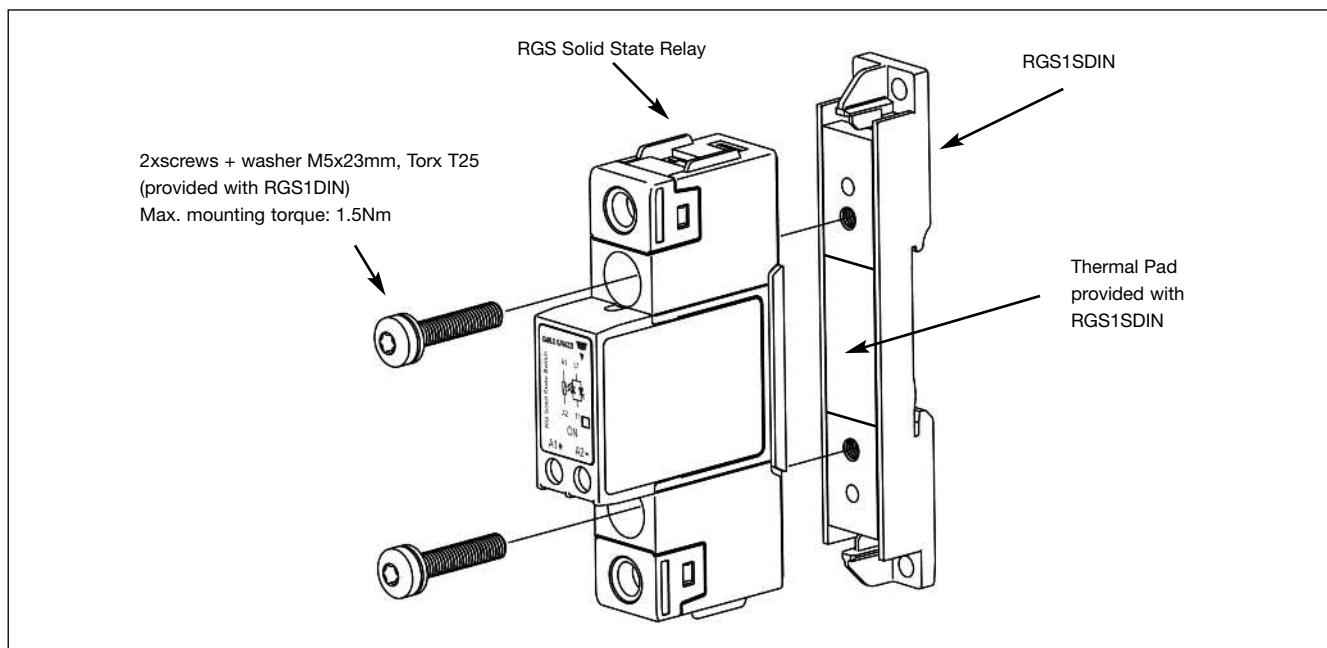

RGS1DIN Dimensions

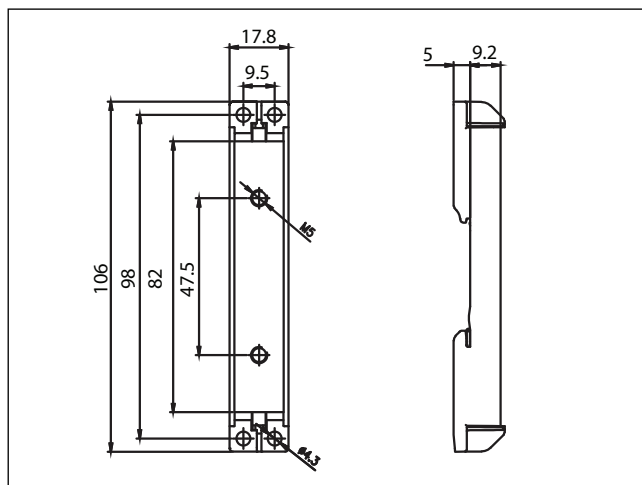

Installation Instructions

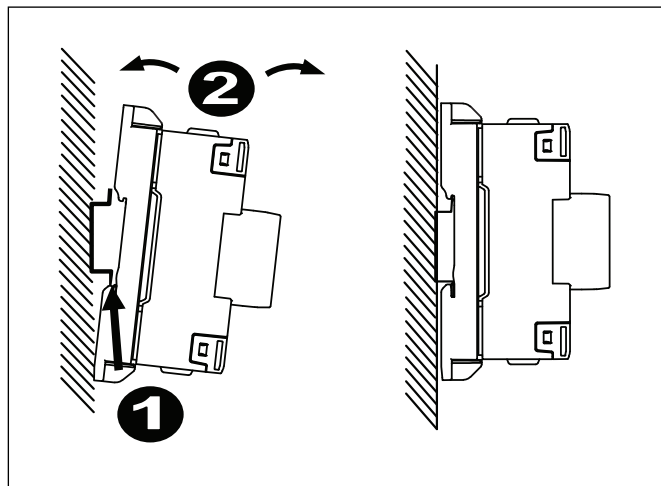

Accessories

Thermal Pads



Ordering Key

Thermal pad
mounted on RGS

RGS...HT

Pack of 10 thermal pads
size 34.6 x 14mm

RGHT

Control Plugs



Ordering Key

Pack of 10 spring
loaded control plugs

RGM25

* Refer to 'Connection Specifications' section for further details.