www.vcx.com.pl

KATALÓGOVÝ LIST

Odpínač DC model CYKB-63+MX+OFF, 1000V DC, 32A integrovaný s napäťovou spúšťou



TECHNICKÉ ÚDAJE:

- Menovitý prúd 32A DC
- Menovité napätie Ui: 1000 V DC (250V DC na modul)
- Polarizovaný: nie
- Prevádzková teplota: -40 ~+ 85 °C
- Impulzné napätie Uimp = 8kV
- Stupeň krytia: IP20
- Ako hlavný odpínač: Áno
- Menovitý trvalý prúd 32 A
- Vhodný na inštaláciu v rozvádzačoch: Áno
- Ako servisný odpínač: Áno
- Montážne vodiče 1-35mm²
- Uťahovací moment: 2-3,5Nn
- Šírka vyjadrená počtom modulov: 5
- Stupeň krytia: IP20
- Zhoda s normou IEC/EN 60947-3
- Napäťová spúšť: 120-230V AC/120V DC


SÉRIA	NÁZOV VÝROBKU	BALENIE	KAT. ČÍSLO
CYKB-63+MX+OFF	Odpínač DC model CYKB-63+MX+OFF, 1000V DC, 32A	2 ks	CYKB-63+MX+OFF

Bezpečnostné informácie:


- Inštaláciu, údržbu a prípadnú výmenu tohto zariadenia smie vykonávať výhradne kvalifikovaná a oprávnená osoba.
- Pri inštalácii, používaní, údržbe a výmene zariadenia je nutné dodržať všetky príslušné miestne, regionálne a národné predpisy.
- Otvorenie alebo akýkoľvek iný zásah do zariadenia má za následok stratu záruky.
- Zaťaženie prekračujúce hodnoty uvedené výrobcom môže poškodiť samotné zariadenie aj pripojené elektrické obvody.
- Prevádzka a montáž zariadenia je povolená výhradne za podmienok uvedených v návode a v ďalších dokumentoch k výrobku.
- Pred začatím práce odpojte zariadenie od napájania.

SCHÉMA ZAPOJENIA 1000V DC:

POUŽITE PREPOJKU MEDZI SVORKAMI 2 a 4 A 6 a 8

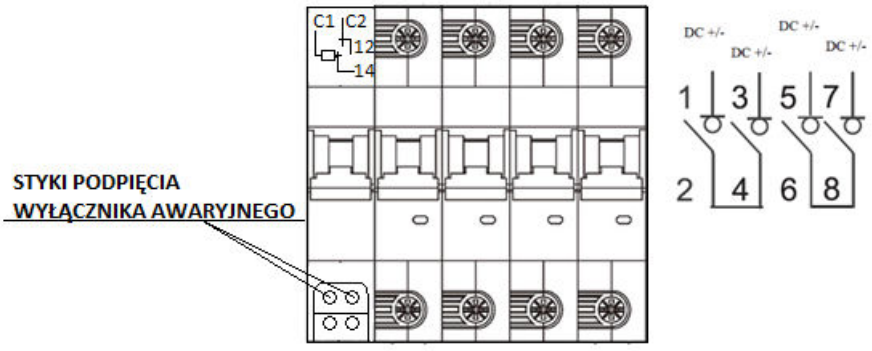

ROZMERY:

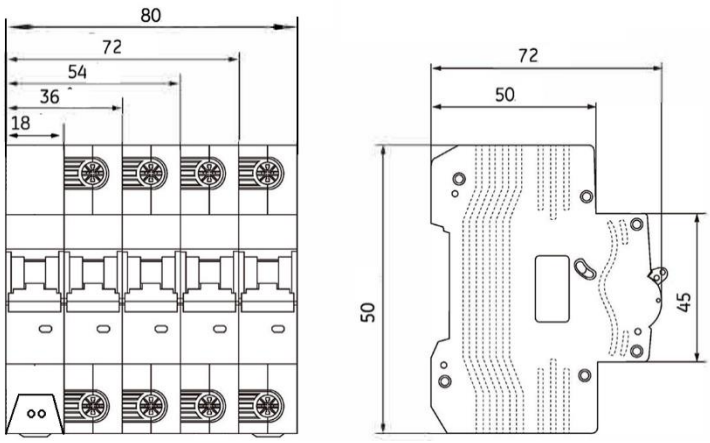

www.vcx.com.pl

DATA SHEET

DC circuit breaker model CYKB-63+MX+OFF, 1000V DC, 32A integrated with a rise trigger



TECHNICAL DATA:

- Rated current 32A DC
- Rated voltage Ui: 1000V DC (250V DC per module)
- Polarized: no
- Operating temperature: -40 ~+ 85st. C
- Surge voltage Uimp = 8kV
- Degree of protection: IP20
- As main disconnector: yes
- Rated continuous current 32A
- Suitable for installation in switchboards: Yes
- As a service disconnector: Yes
- Mounting conductors 1-35mm²
- Tightening torque: 2-3,5Nn
- Width expressed in number of fields: 5
- Degree of protection: IP20
- IEC/EN 60947-3 compliant
- Increase trip: 120-230V AC/120V DC


SERIES	NAME OF PRODUCT	PACKAGING	CATALOG No.
CYKB-63+MX+OFF	DC circuit breaker model CYKB-63+MX+OFF, 1000V DC, 32A	2 pieces	CYKB-63+MX+OFF

Safety information:

- Installation, maintenance and possible replacement of this appliance must only be carried out by a qualified and authorised person.
- All relevant local, regional and national regulations must be complied with when installing, using, maintaining and replacing the unit.
- Opening or otherwise tampering with the unit will void the warranty.
- Loads exceeding the values specified from the manufacturer may damage the device itself as well as the connected electrical systems.
- Operation and assembly of the device is only permitted in accordance with the conditions contained in the manual and other product documents.
- Disconnect the power supply to the appliance before starting work.

WIRING DIAGRAM 1000V DC:

APPLY a bridge between clamps 2 and 4 and 6 and 8

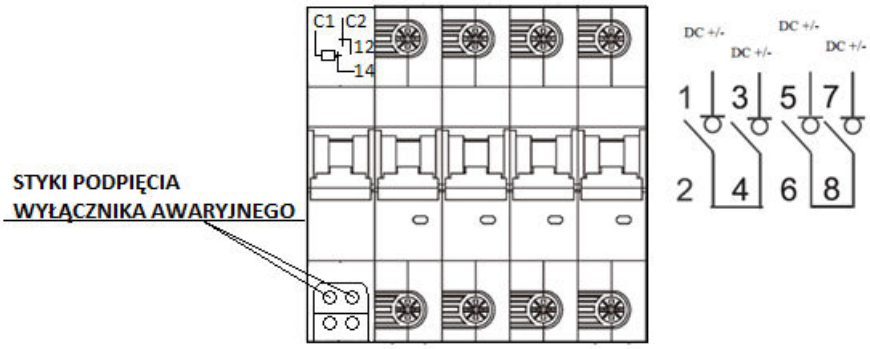

DIMENSIONS:

